

RSWM-4X4R

Wideband Non-Blocking 4X4 Switching Matrix, 100 kHz ... 4000 MHz

Features

- high dynamic
- high isolation
- non-reflective
- compact 19" 1U design
- graphical user interface

Applications

- radio monitoring
- spectrum monitoring
- COMINT / SIGINT



At a Glance


Modern radio monitoring systems need an unrestricted access to many antennas from a variety of receivers. By using the non-blocking architecture of RSWM, specialized and general-purpose receivers can be used alongside each other and choose any of the available antennas without interference between the receivers.

The high linearity and low noise figure of the device ensure the best signal integrity from the antenna to the receiver. Low cross-talk enables the reception of weak signals on one antenna even in the presence of strong signals on a different antenna.

The large bandwidth covers most commercial communication bands, especially those travelling long distances. These include short-wave transmission at one end and private 4G/5G bands at the other end.

Principal Block Diagram

The RSWM-4X4R features four equivalent inputs and four equivalent outputs interconnected via a non-blocking matrix. A single input can route to multiple outputs without any loss of signal transmission.



Wear-free Solid-State Switches

The RSWM-4X4R incorporates modern solid-state switching elements, guaranteeing rapid response to operational inputs and an unlimited number of switching cycles with minimal maintenance requirements.

High Channel Isolation

To prevent unintentional signal coupling between different signal types, the device provides high channel isolation. Strong and weak signals in adjacent radio channels do not affect each other.

Versatile Control

The RSWM-4X4R is equipped with multiple control options for user convenience. It features a local MMI on the front panel, as well as LAN and USB interfaces. Depending on the customer's needs, the system can be managed using the intuitive web-based graphical user interface or through SCPI-based ASCII commands via its interface ports.

Synchronous Operation

The RSWM-4X4R offers two switching modes:

- Direct: every switching operation is executed after reception of the command.
- Synchronous: all switching commands are stored until a "SYNC" command executes the switching operation synchronously.

External Triggering

Similar to several other products from Becker Nachrichtentechnik GmbH, the RSWM-4X4R includes a TRIGGER IO port. This physical interface enables the device to execute switching operations synchronously across multiple matrices, triggered by hardware signals.

Optional High Pass Filter

The RSWM can be equipped with an optional high-pass filter designed to attenuate unwanted low-frequency (LF) and high-frequency (HF) signals, such as those from local AM radio stations.

Filters for Short Wave

To enable operation in short-wave applications up to 30 MHz, the variant covering 100 kHz to 4000 MHz can be enhanced with externally mounted bandpass filters. These filters effectively suppress out-of-band signals in the VHF and UHF ranges, preventing unintentional distortions within the short-wave frequency range. They can be easily attached to the RF input socket of the RSWM.



RF Specification

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Impedance	Z_{IN}/Z_{OUT}		50		Ω	
number of inputs	N_{IN}		4			
number of outputs	N_{OUT}		4			
low frequency	f_{MIN}		100	300	kHz	
low frequency	f_{MIN}			20	MHz	variant with VLF HF suppression
high frequency	f_{MAX}	4000	4500		MHz	
VLF / HF suppression	S_{21}		-25	-15	dB	@ 5 MHz rel. 100 MHz variant with VLF HF suppression
gain	S_{21}	-2	2	3	dB	$f < 1$ GHz
	S_{21}	-2	0	2	dB	$f \geq 1$ GHz
input return loss	S_{11}		-13	-8	dB	$f \leq 2$ GHz
	S_{11}		-10	-5	dB	$f > 2$ GHz
output return loss	S_{22}		-17	-12	dB	$f \leq 2$ GHz
	S_{22}		-15	-10	dB	$f > 2$ GHz
1 dB compression	P_{1dB}	+5	+8		dBm	$500 \text{ kHz} \leq f \leq 1 \text{ GHz}$
	P_{1dB}	+3	+7		dBm	$1 \text{ GHz} < f \leq 3 \text{ GHz}$
	P_{1dB}	-2	+3		dBm	$f > 3 \text{ GHz}$
reverse isolation	S_{12}		-60	-50	dB	
3 rd order intercept	OIP3	+18	+26		dBm	$1 \text{ MHz} \leq f \leq 2 \text{ GHz}$, note 1
2 nd order intercept	OIP2	+30	+48		dBm	$1 \text{ MHz} \leq f \leq 1 \text{ GHz}$, note 1
noise figure	NF		7	10	dB	$f \geq 5 \text{ MHz}$
channel isolation	S_{32}		-80	-45	dB	
output isolation	S_{12}		-35	-30	dB	
RF input power	P_{RF}			+15	dBm	no damage
maximum DC voltage	U_{DC}			20	V	all RF ports
ESD discharge resistor	R_{ESD}		4.7		k Ω	all RF ports
RF connectors	X_{RF}	N female				
processing time	t_{SW}		15		ms	between two switching commands
trigger input	X_{TRIG}	BNC female				internal 1 k Ω pull up, active high
trigger level	U_{TRIG}	TTL (0 / 5 V)				
trigger offset	t_{O_FALL}		6.5		μ s	50% trigger → 50% RF falling edge, note 2
	t_{O_RISE}		1.1		μ s	50% trigger → 50% RF rising edge, note 2
switch rise time	t_{RISE}		1		μ s	10% → 90% RF
switch fall time	t_{FALL}		2		μ s	90% → 10% RF

Note 1: tested at $P_{out} 2 \times -10\text{dBm}$; $\Delta f = 2 \text{ MHz}$


Note 2: capacitive load at 'TRIGGER IO' Port $\leq 100\text{pF}$, trigger mode "OUT"

Common Specification

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
power supply	U _{AC}	90	230	260	V	50 / 60 Hz AC
power consumption	P _{AC}		18		W	
power socket	X _{AC}	IEC-60320 C14				country specific mains cable
remote ports	LAN	10/100 BaseT		TCP/IP		RJ45 on rear side
	USB	2.0 (high speed)				USB type B
Dimensions and weight						
dimensions	W x H x D	approx. 482 x 44 x 265			mm	19" 1U, without connectors and handles
weight	m		3.4		kg	
Environment conditions						
operating temp. range	T _o	+5		+45	°C	
storage temp. range	T _s	-40		+70	°C	
Product conformity						
Electromagnetic compatibility	EU: in line with EMC directive (2014/30/EC)				applied harmonized standards: EN61326-2-1, (for use in control and laboratory environments), EN55035, EN55032, EN61000-3-2, EN61000-3-3	
Electrical safety	EU: in line with low voltage directive (2014/35/EC)				applied harmonized standard: EN 61010-1	
Ordering information	RSWM-4X4R	1205.4102.1				variant with VLF HF suppression 20 MHz...4000 MHz
	RSWM-4X4R	1205.4102.2				variant w/o VLF HF suppression 100 kHz...4000 MHz

Application Examples

The RSWM-4X8R is versatile, catering to radio monitoring applications and research and development test environments. With the RSWM products, customers can easily route input signals to any device output. As illustrated, the input can be connected to various signal sources or antennas:

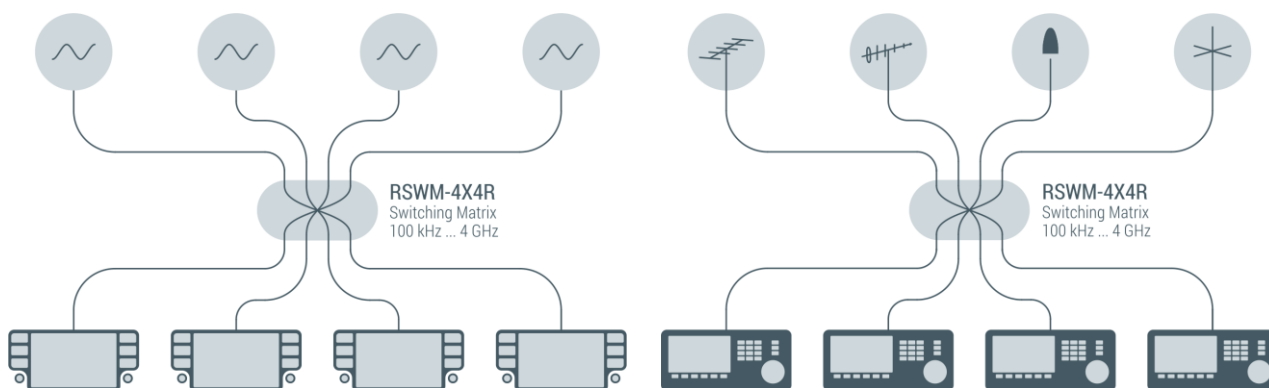

Car Infotainment Test with different GNSS Position Data

Wideband Radio Monitoring

Graphical User Interface

The graphical user interface (GUI) enables users to define custom labels tailored to their specific applications, making input selection more contextually meaningful.

 RSWM-4X4R

Switching Matrix

Setup ▾

Diagnostics ▾

System ▾

Help ▾

Switching Matrix

All OFF

OUT1X21

X (OFF) ▾

OUT2X22

X (OFF) ▾

OUT3X23





X (OFF) ▾


OUT4X24

X (OFF) ▾

22.1.2018, 08:24:10

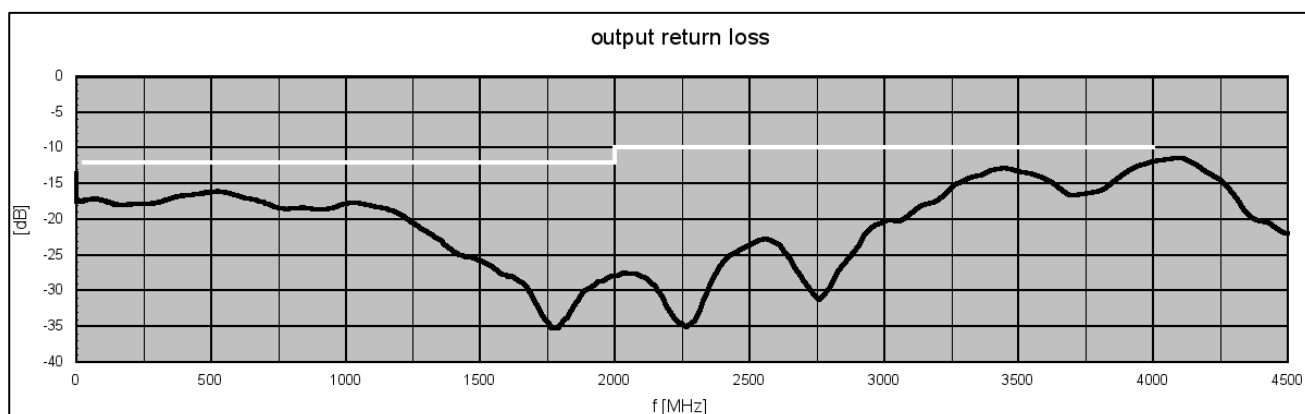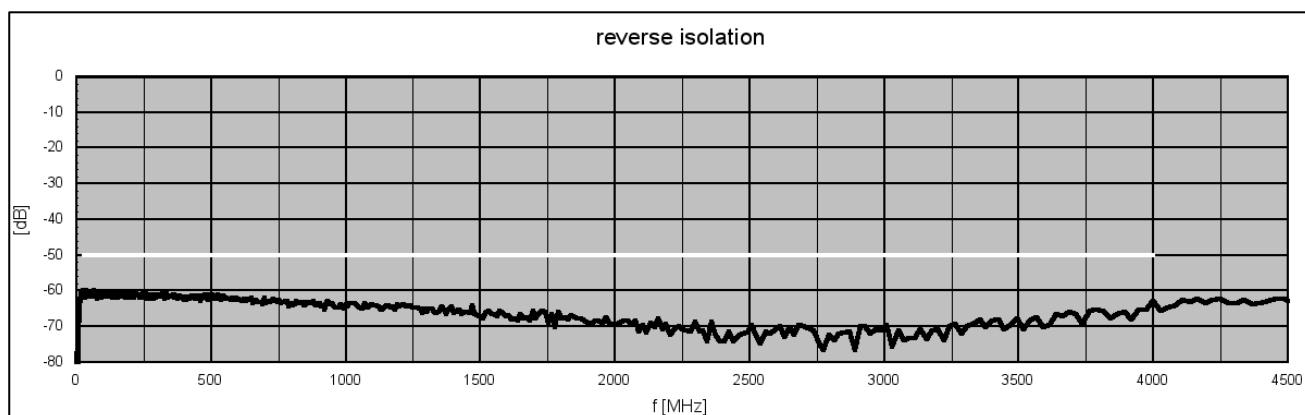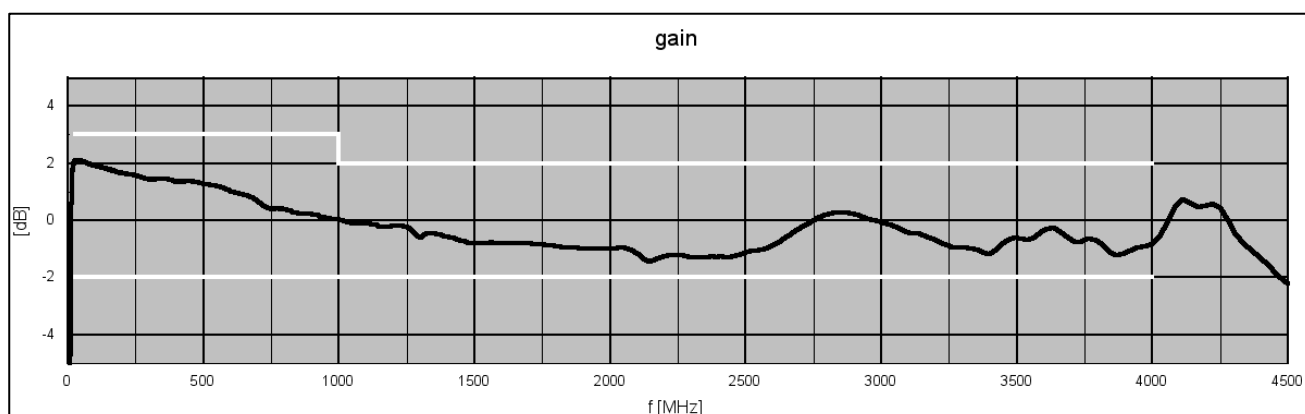
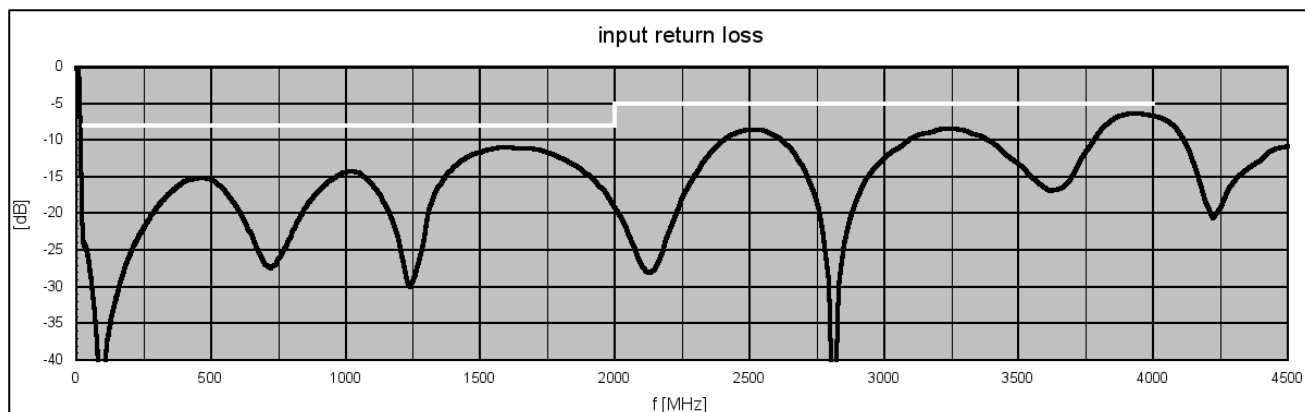


S-Parameters*typical responses*

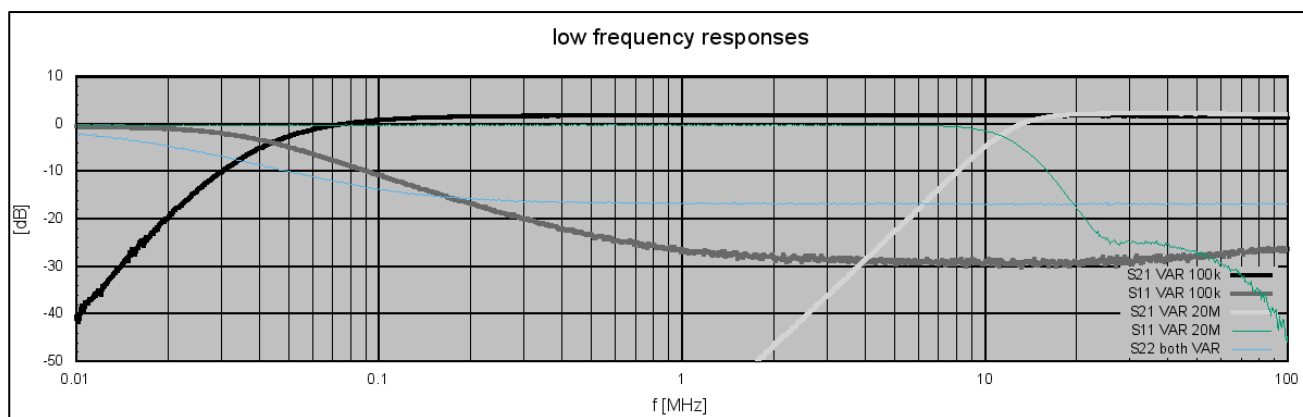



Isolations

typical responses

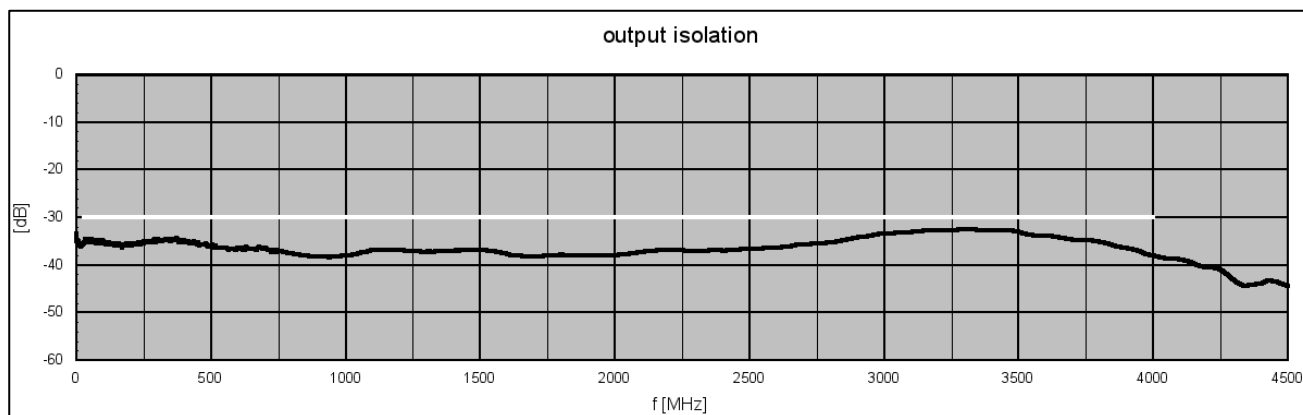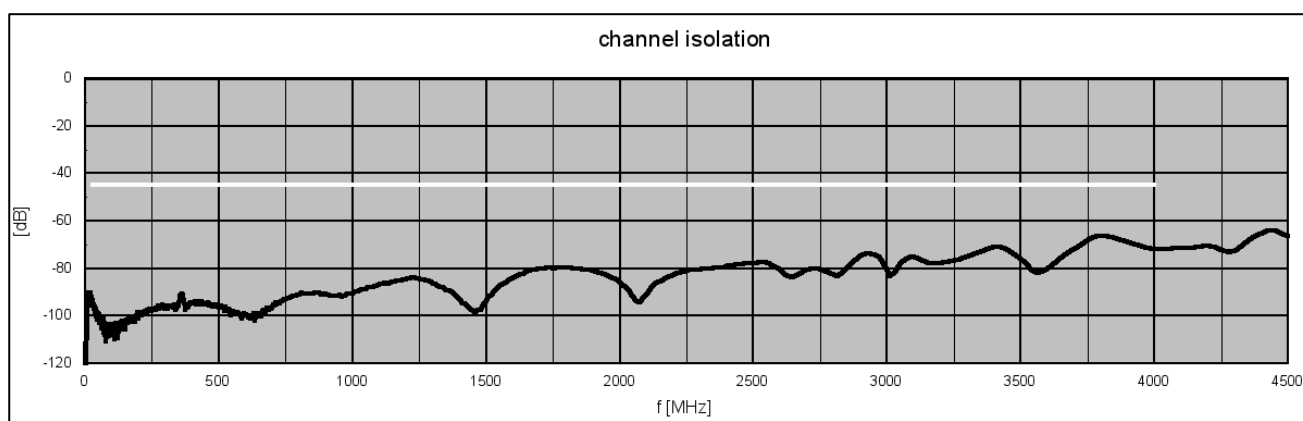


Dynamic Range


typical responses

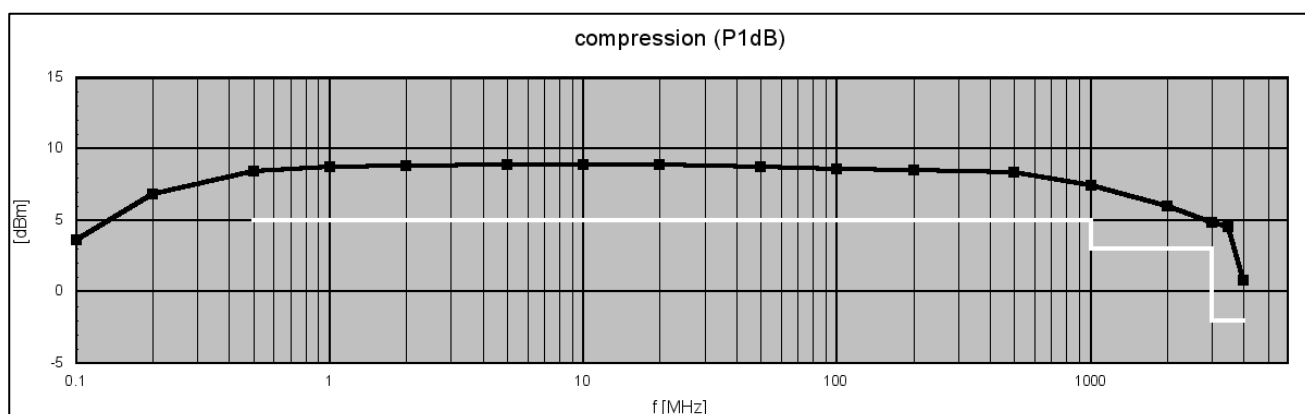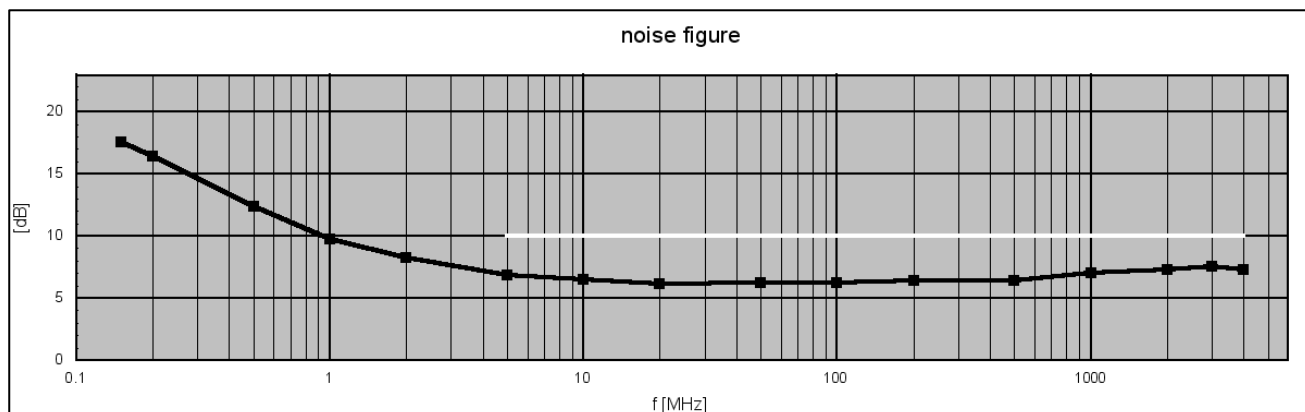


Linearity

typical responses

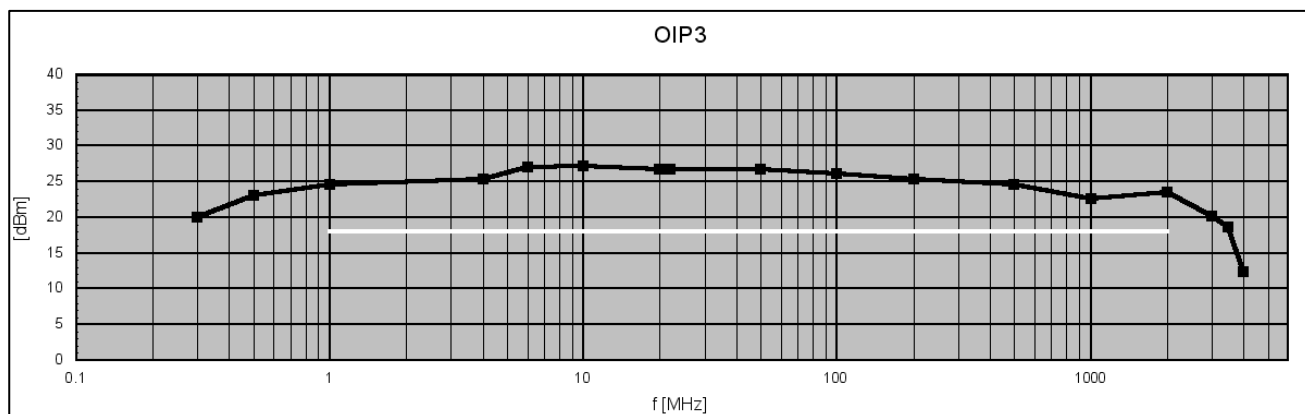

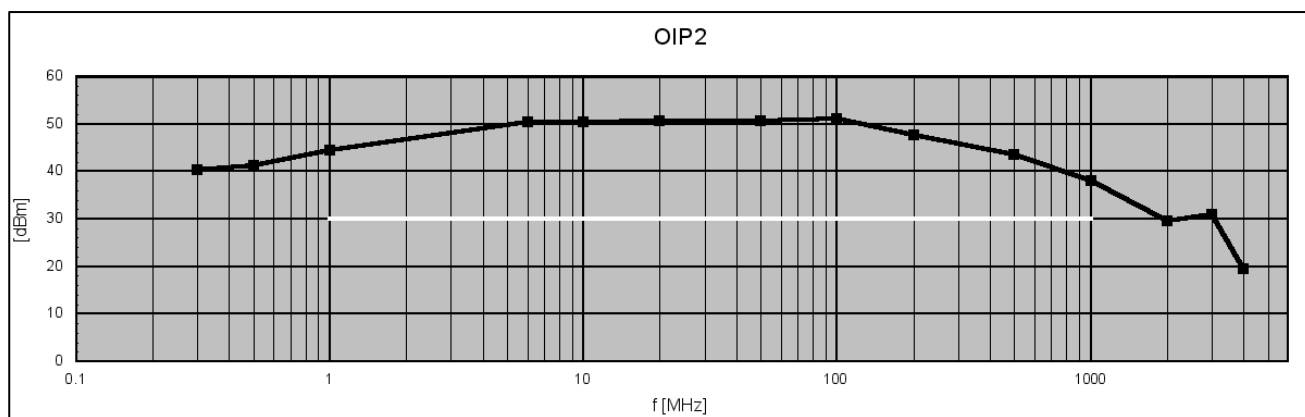

S-Parameters with band pass filter for short wave application

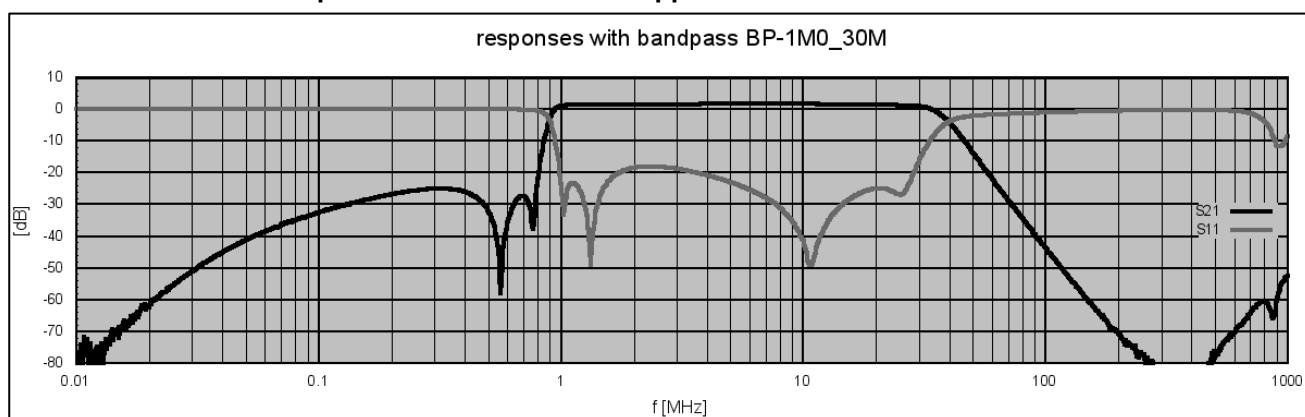

Transmission and input return loss with 1 ... 30 MHz band pass filter BP-1M0_30M installed in RF input.

Appearance of external mountable filter



Filters for short wave with different bandwidths are available. See table related products.

Appearances


Front View



Rear View



Dimensions

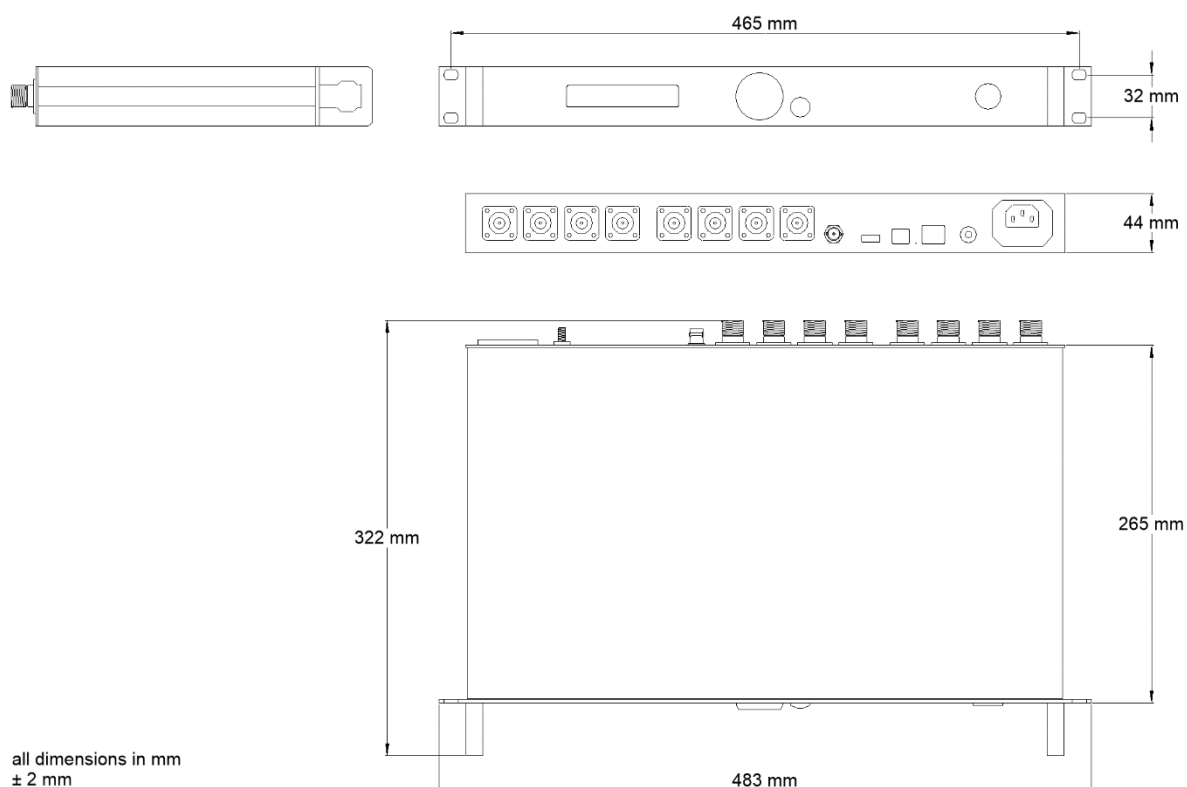

Related Products

Product	P/N	Description
RSWM-4X4LR	1205.4402.X	Wideband Non-Blocking 4X4 Switching Matrix 100 kHz ... 4000 MHz LAN remote interface with SNMPv2 trap function
RSWM-4X8LR	2103.4452.X	Wideband Non-Blocking 4X8 Switching Matrix 100 kHz ... 4000 MHz LAN remote interface with SNMPv2 trap function
RSWM-8X8LR	2103.4552.X	Wideband Non-Blocking 8X8 Switching Matrix 100 kHz ... 4000 MHz LAN remote interface with SNMPv2 trap function
RSWM-4X4R	1205.4102.X	High-Dynamic Non-Blocking 4X4 Switching Matrix 100 kHz ... 4000 MHz LAN remote interface with SNMPv2 trap function
RSWM-4X8R	2103.4302.X	High-Dynamic Non-Blocking 4X8 Switching Matrix 100 kHz ... 4000 MHz LAN remote interface with SNMPv2 trap function
RSWM-8X8R	2103.4502.X	High-Dynamic Non-Blocking 8X8 Switching Matrix 100 kHz ... 4000 MHz LAN remote interface with SNMPv2 trap function
RSWM-4X4ER	1205.4202.X	Extremely Wideband Non-Blocking 4X4 Switching Matrix 20 ... 8000 MHz LAN remote interface with SNMPv2 trap function
RSWM-4X8ER	2103.4402.X	Extremely Wideband Non-Blocking 4X8 Switching Matrix 20 ... 8000 MHz LAN remote interface with SNMPv2 trap function
RSWM-8X8ER	2103.4602.X	Extremely Wideband Non-Blocking 8X8 Switching Matrix 20 ... 8000 MHz LAN remote interface with SNMPv2 trap function
BSWM-4X4ER	1205.4502.X	4X4 Bidirectional Blocking Wideband Switching Matrix 100 kHz ... 8000 MHz LAN remote interface with SNMPv2 trap function
BSWM-4X8ER	2103.4702.X	4X8 Bidirectional Blocking Wideband Switching Matrix 100 kHz ... 8000 MHz LAN remote interface with SNMPv2 trap function
BSWM-8X8ER	2103.4802.X	8X8 Bidirectional Blocking Wideband Switching Matrix 100 kHz ... 8000 MHz LAN remote interface with SNMPv2 trap function

Related Accessories

External filters for short wave applications

Product	P/N	Description
BP-0M5_30M	1502.6301.1	Band Pass Filter Module 0.5 ... 30 MHz 90 V surge arrestor and 100 k Ω ESD resistor to GND at input, level limiter, stop band rejections: 30 dB typ. $f < 400$ kHz, 45 dB typ. $80 \text{ MHz} \leq f \leq 200 \text{ MHz}$, N RF connectors (male / female)
BP-1M0_30M	1502.6311.1	Band Pass Filter Module 1.0 ... 30 MHz 90 V surge arrestor and 100 k Ω ESD resistor to GND at input, level limiter, stop band rejections: 30 dB typ. $f < 800$ kHz, 45 dB typ. $80 \text{ MHz} \leq f \leq 200 \text{ MHz}$, N RF connectors (male / female)
BP-1M7_30M	1502.6321.1	Band Pass Filter Module 1.7 ... 30 MHz 90 V surge arrestor and 100 k Ω ESD resistor to GND at input, level limiter, stop band rejections: 30 dB typ. $f < 1.3 \text{ MHz}$, 45 dB typ. $80 \text{ MHz} \leq f \leq 200 \text{ MHz}$, N RF connectors (male / female)
LP-30M	1107.6301.1	30 MHz Low Pass Filter Module Passband DC...30 MHz 90 V surge arrestor and 100 k Ω ESD resistor to GND at input, level limiter, stop band rejection: 45 dB typ. @ $80 \text{ MHz} \leq f \leq 200 \text{ MHz}$, N RF connectors (male / female)