

## WSDU-1X8LR

High Dynamic 8 Way Multicoupler for Broadcast Signals, 100 kHz ... 4000 MHz

### Features

- wideband
- high dynamic
- lossless signal distribution
- auxiliary input / output



### Applications

- product development, production, product verification, quality assurance
- broadcast signal distribution
- AM, FM, IBOC, DAB, DVB-T, GNSS, SDARS


### At a Glance

Multicouplers are needed to distribute a common broadcast signal sources to many outputs without loss in level and low distortion. Modern infotainment components (devices under test) DUTs need a lot of different RF signals for a complete operation. Due the large operating frequency range and the high dynamic range, the WSDU-1X8LR is the fitting solution to multiply RF-signals to up to 8 ports.

The WSDU-1X8LR is the right solution for innovative broadcast signal distribution systems that must cover the frequency range for all signal types, beginning with the AM range up to SDARS satellite radio.

### Simplified Block Diagram

The WSDU-1X8LR distributes the signals from one input to 8 equal outputs without loss in level.

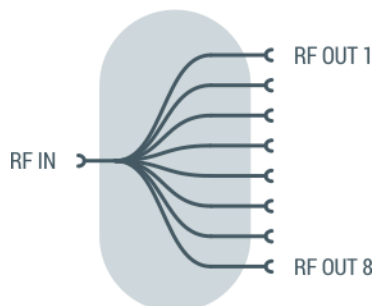

### Lossless 1 to 8 Signal Distribution

The signal at the input is amplified by using broadband low-noise amplifiers with a wide dynamic range -weak signals are linearly amplified even if they occur next to signals with very strong levels-. As a result, the distributed input signal is made available at the eight outputs without any loss in level.

The hardware structure of the distribution offers optimal phase and amplitude balance performance. All inputs and outputs have N female connectors.

### High Port-to-Port Isolation

WSDU-1X8LR features a high port-to-port isolation. The connected receivers are prevented from affecting each other, e.g., via local oscillators or synthesizers.

### Auxiliary Port

For maintenance during operation the auxiliary port offers the complete signal spectrum. It can be monitored without signal interruption. Alternative the auxiliary port can be used for an additional signal injection.

**RF Specification**





Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
impedance	$Z_{IN}/Z_{OUT}$		50		$\Omega$	
low frequency	$f_{MIN}$		100	150	kHz	
high frequency	$f_{MAX}$	4000	4500		MHz	
gain	$S_{21}$	1.0	3.0	4.0	dB	$f \leq 1500$ MHz
	$S_{21}$	1.0	3.0	4.5	dB	$1500 \text{ MHz} < f \leq 3000$ MHz
input return loss	$S_{11}$		-14	-10	dB	$500 \text{ kHz} \leq f \leq 3000$ MHz
output return loss	$S_{22}$		-20	-10	dB	$f \leq 3000$ MHz
reverse isolation	$S_{12}$		-90		dB	
output isolation	$S_{23}$		-25	-20	dB	neighbored outputs (d=1)
	$S_{23}$		-57		dB	distance > 1
1 dB compression	$P_{1dB}$	+7	+8		dBm	$f \leq 500$ MHz
	$P_{1dB}$	+5	+7			$500 \text{ MHz} < f \leq 3000$ MHz
3 <sup>rd</sup> order intercept	$OIP3^1$	+16	+20		dBm	$f = 1000$ MHz
	$OIP3^1$	+15	+18		dBm	$f = 2000$ MHz
	$OIP3^1$	+13	+16		dBm	$f = 3000$ MHz
noise figure	NF		11	14	dB	
maximum input power	$P_{in \max}$			+15	dBm	CW, no damage
DC voltage	$U_{DC}$			20	V	input and outputs
ESD discharge resistor	$R_{ESD}$		4.7		k $\Omega$	input and outputs
RF connectors	$X_{RF}$	N female				
monitor coupling	a		-30		dB	bidirectional




Note 1: frequency space 100 MHz

**Common Specification**


Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
AC supply variant						
voltage supply range	U <sub>AC</sub>	90	230	260	V	50 / 60 Hz AC
power consumption	P		13	50	W	
power socket	X <sub>AC</sub>	IEC-60320 C14				country specific mains cable
Dimensions and weight						
dimensions	W x H x D	approx. 482 x 44 x 145			mm	19" 1 U, without connectors and handles
weight	m		3.5		kg	
Environment Conditions						
operating temp. range	T <sub>o</sub>	+5		+45	°C	
storage temp. range	T <sub>s</sub>	-40		+70	°C	
Product conformity						
Electromagnetic compatibility	EU: in line with EMC directive (2014/30/EC)				applied harmonized standards: EN 61326-1 (for use in industrial environment), EN 61326-2-1, EN 55011 (class B), EN 61000-3-2, EN 61000-3-3	
Electrical safety	EU: in line with low voltage directive (2014/35/EC)				applied harmonized standard: EN 61010-1	
Ordering information	WSDU-1X8LR		P/N: 1107.6152.1			

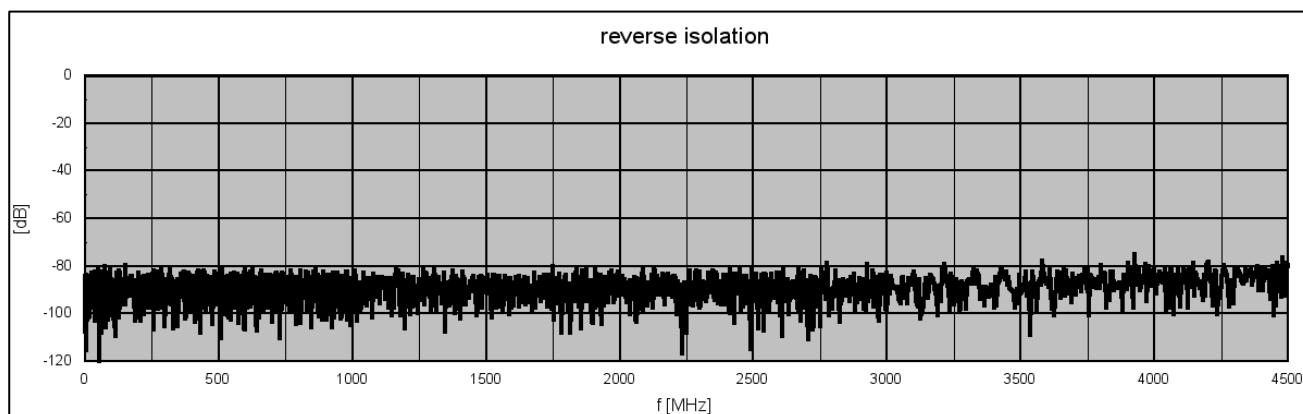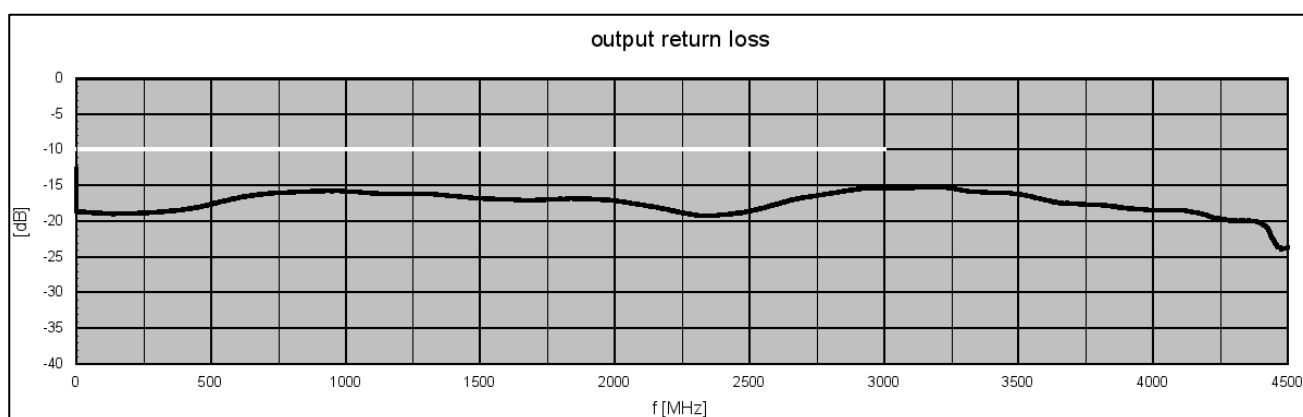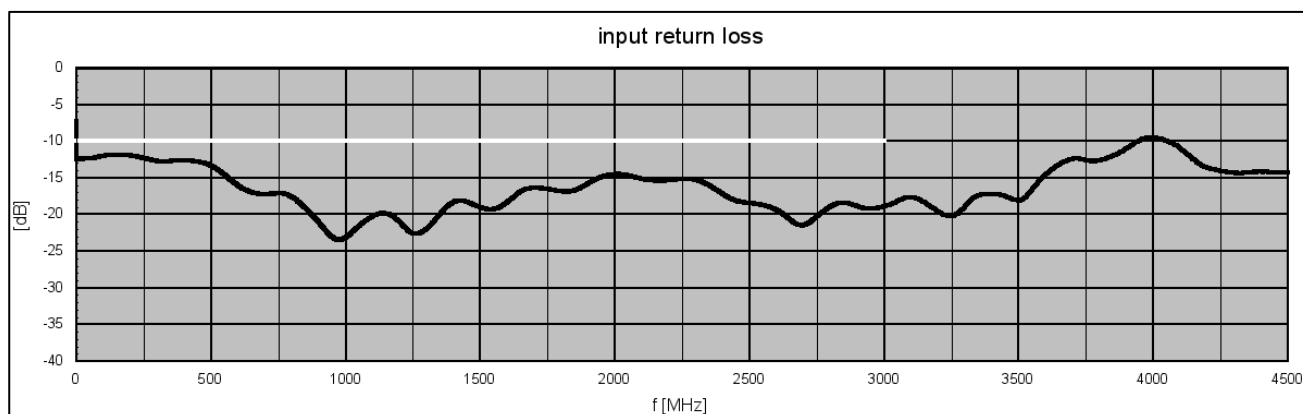
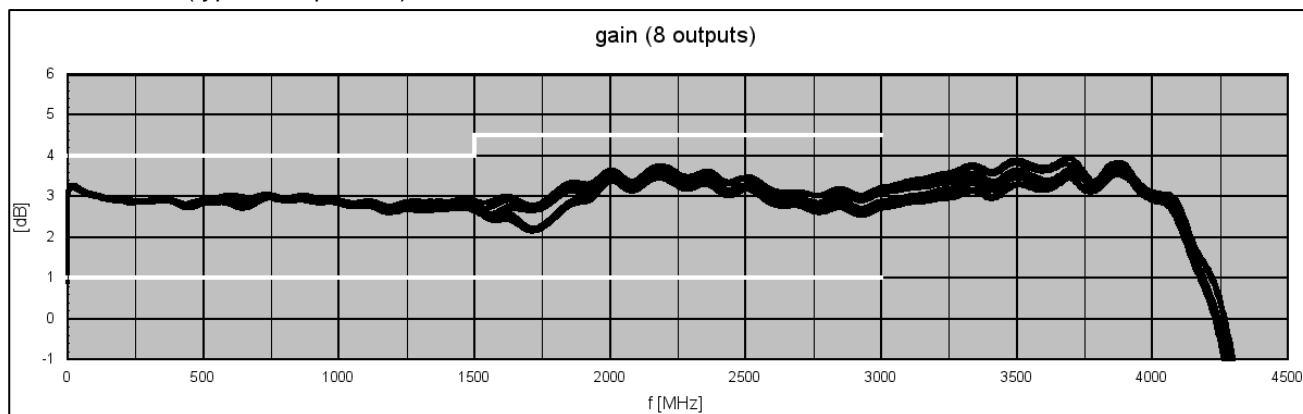


**S-Parameters** (typical responses)

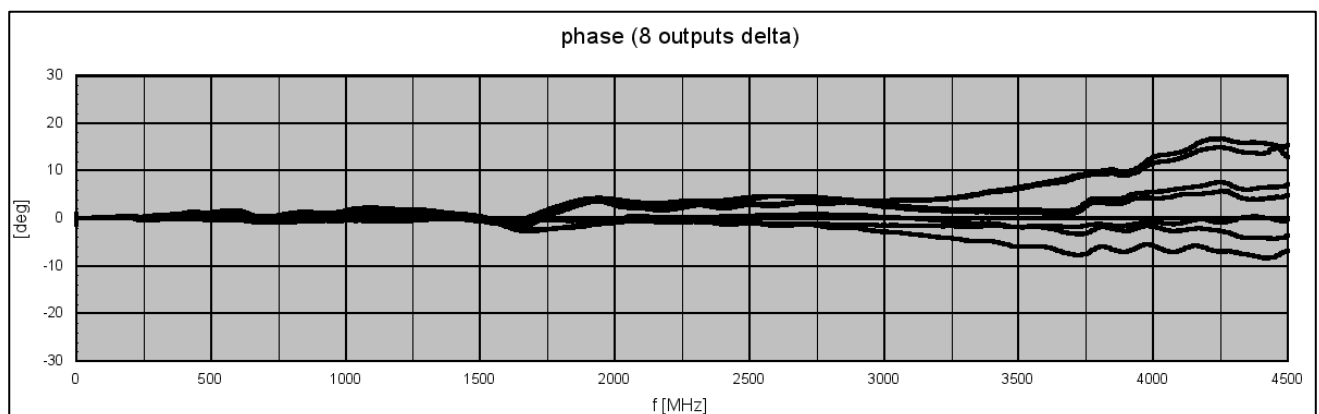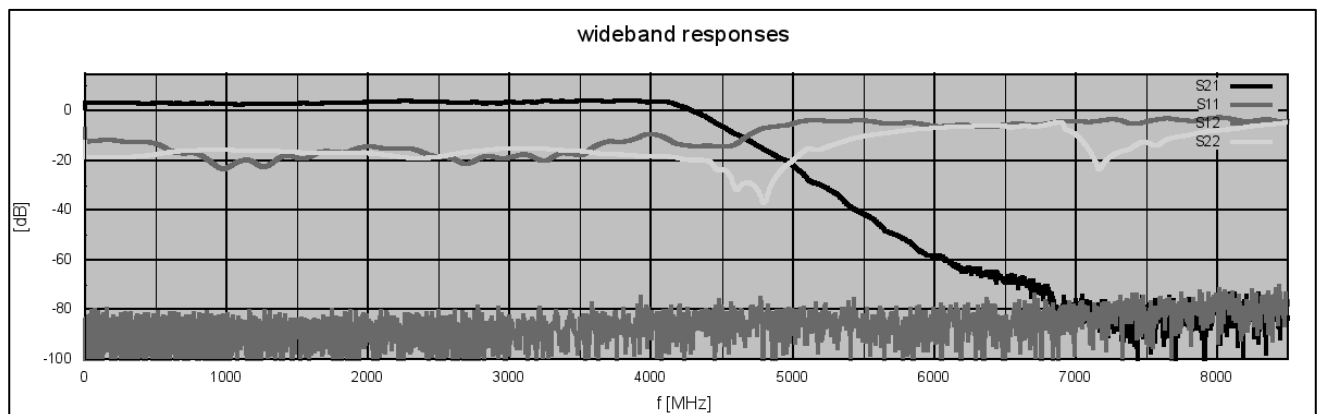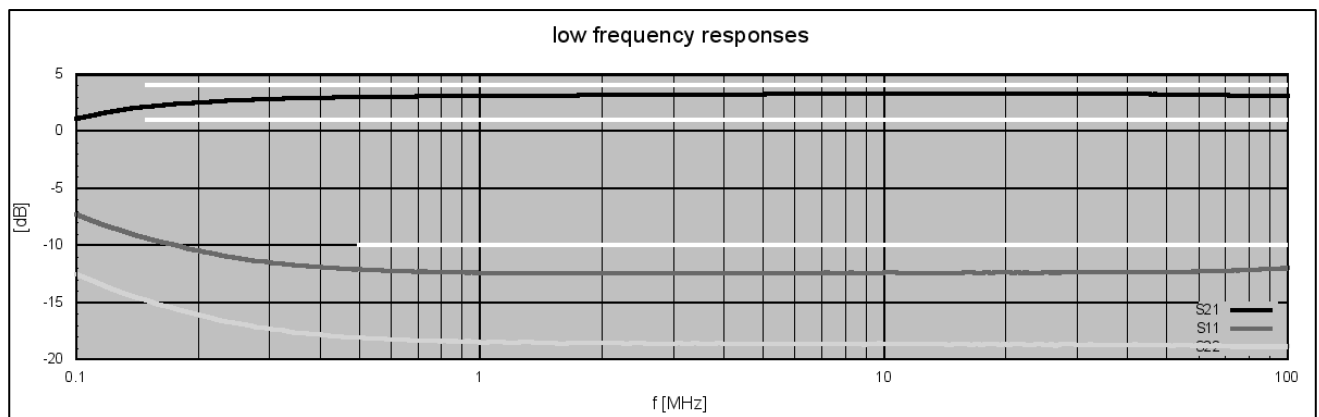

### Dynamic Range (typical responses)

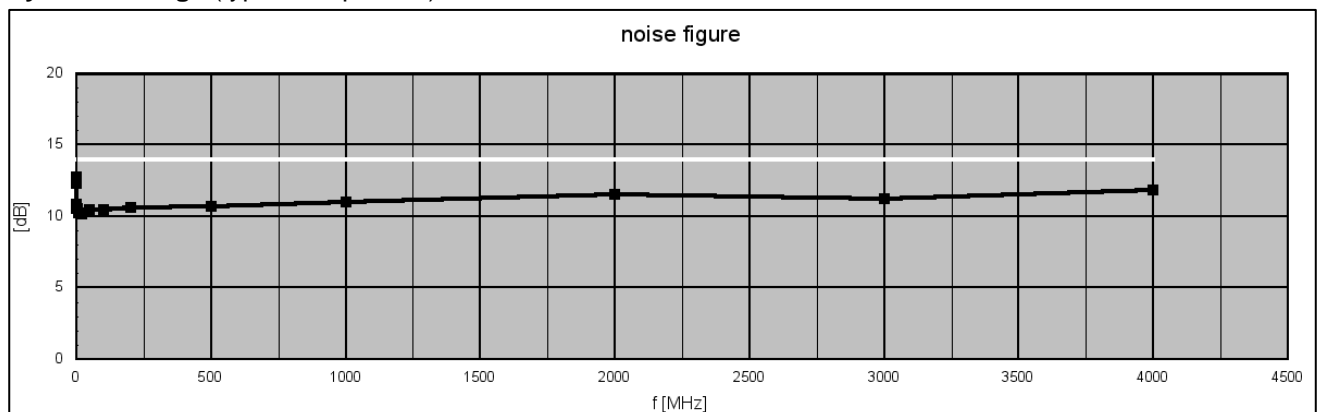

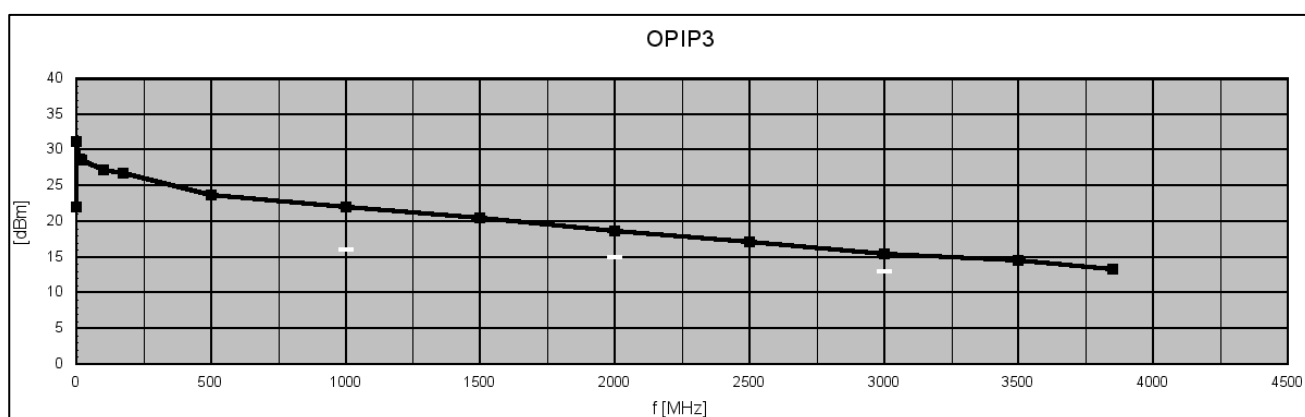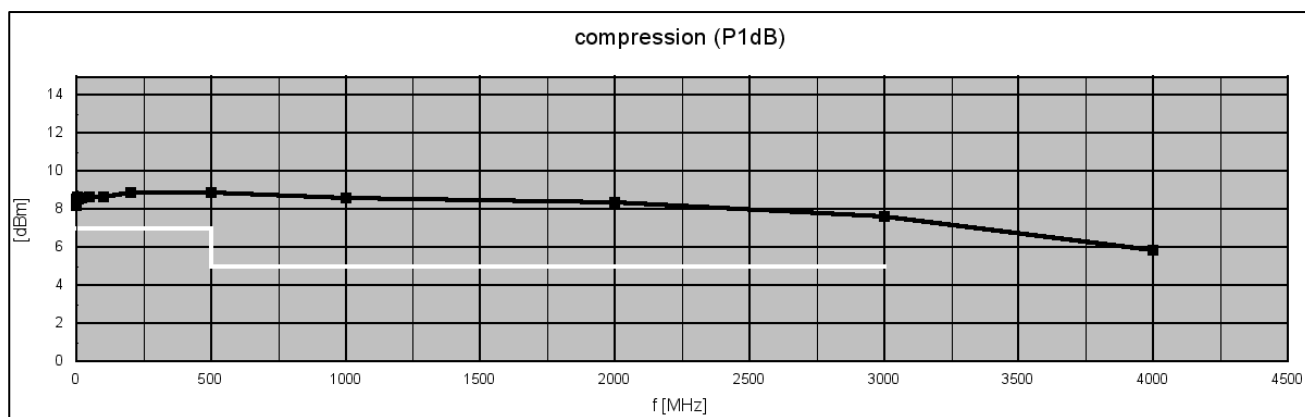

## Appearances


### Front View



### Rear View



## Dimensions

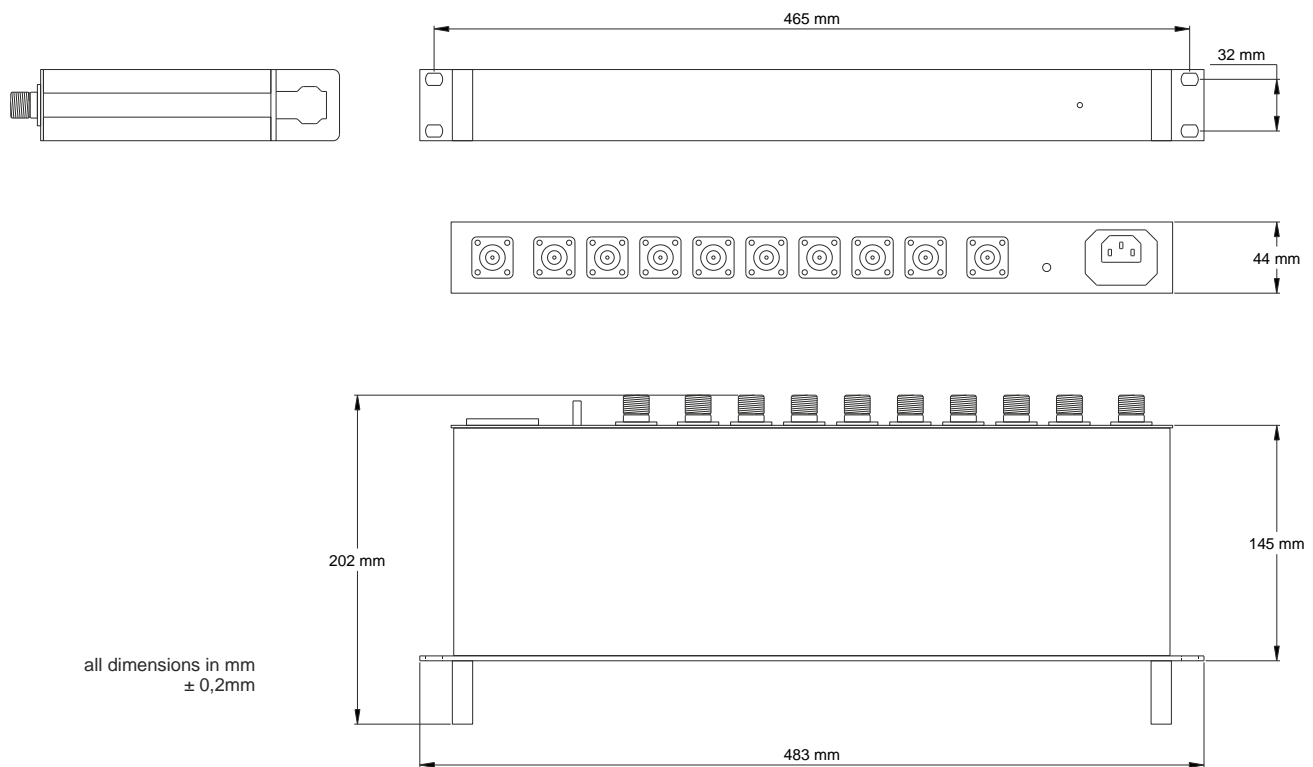

**Related Products**

Product	P/N	Description
WSDU-1X8LR	1107.6152	High Dynamic 8 Way Multicoupler for Broadcast Signals 100 kHz ... 4000 MHz AC or DC power supply
WSDU-2X4LR	1107.6252	High Dynamic 2 Section 4 Way Multicoupler for Broadcast Signals 100 kHz ... 4000 MHz AC or DC power supply
WSDU-1X8R	1107.6102	High Dynamic 8 Way Multicoupler 100 kHz ... 4000 MHz AC or DC power supply
WSDU-2X4R	1107.6202	High Dynamic 2 Section 4 Way Multicoupler 100 kHz ... 4000 MHz AC or DC power supply
WSDU-1X8AR	1807.6302	8 Way High Dynamic Signal Conditioning Multicoupler 100 kHz...4000 MHz AC or DC power supply
WSDU-1X8SR	1502.6102	High Dynamic 1X8 Shortwave Signal Distribution Unit 200 kHz ... 30 MHz AC or DC power supply Variant with LAN remote interface with SNMPv2 trap function available
WSDU-2X4SER	2306.6102	2-Section 4-Way Signal Distribution Unit Section A: 200 kHz ... 30 MHz Section B: 20... 8000 MHz AC or DC power supply Variant with LAN remote interface with SNMPv2 trap function available
WSDU-1X8ER	1501.6302	Extremely Wideband 1 to 8 Signal Distribution Unit 20 ... 8000 MHz AC or DC power supply Variant with LAN remote interface with SNMPv2 trap function available
WSDU-2X4ER	1501.6202	Extremely Wideband 2 Section 1X4 Signal Distribution Unit 20 MHz... 8000 MHz AC or DC power supply Variant with LAN remote interface with SNMPv2 trap function available
WSDU-1X8UR	2109.6002	Ultra-Wideband 8-Way Signal Distribution Unit 100 kHz ... 18 GHz AC or DC power supply LAN remote interface with SNMPv2 trap function