

# RSWM-8X8LR

Wideband Non-Blocking 8X8 Switching Matrix, 100 kHz ... 4000 MHz

## Features

- high dynamic
- high isolation
- non-reflective
- compact 19" 1U design
- graphical user interface

## Applications

- RF signal routing
- satellite ground segment IF routing
- infotainment test
- research & development (R&D)
- test and validation equipment



## At a Glance


Modern RF signal routing systems need an unrestricted access to different signal sources like antennas or signal generators.

RSWM is an innovative and efficient solution in the laboratory, test or validation environment to give many test setups unrestricted access to a variety of signal sources. The wide frequency bandwidth up to more than 4 GHz covers all commercial broadcast services including GNSS.

The non-blocking architecture enables free access to all signal sources from any of its outputs. The same signal source can be used by multiple outputs simultaneously.

## Principal Block Diagram

The RSWM-8X8LR features four equivalent inputs and four equivalent outputs interconnected via a non-blocking matrix. A single input can route to multiple outputs without any loss of signal transmission.



## Wear-free Solid-State Switches

The RSWM-8X8LR incorporates modern solid-state switching elements, guaranteeing rapid response to operational inputs and an unlimited number of switching cycles with minimal maintenance requirements.

## High Channel Isolation

To prevent unintentional signal coupling between different signal types, the device provides high channel isolation. Strong and weak signals in adjacent radio channels do not affect each other.

## Versatile Control

The RSWM-8X8LR is equipped with multiple control options for user convenience. It features a local MMI on the front panel, as well as LAN and USB interfaces. Depending on the customer's needs, the system can be managed using the intuitive web-based graphical user interface or through SCPI-based ASCII commands via its interface ports.

## Synchronous Operation

The RSWM-8X8LR offers two switching modes:

- Direct: every switching operation is executed after reception of the command.
- Synchronous: all switching commands are stored until a "SYNC" command executes the switching operation synchronously.

## External Triggering

Similar to several other products from Becker Nachrichtentechnik GmbH, the RSWM-8X8LR includes a TRIGGER IO port. This physical interface enables the device to execute switching operations synchronously across multiple matrices, triggered by hardware signals.

## RF Specification

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Impedance	$Z_{IN}/Z_{OUT}$		50		$\Omega$	
number of inputs	$N_{IN}$		8			
number of outputs	$N_{OUT}$		8			
low frequency	$f_{MIN}$		100	300	kHz	
high frequency	$f_{MAX}$	4000			MHz	
gain	$S_{21}$		2		dB	
input return loss	$S_{11}$		-15		dB	
output return loss	$S_{22}$		-15		dB	$f \leq 3 \text{ GHz}$
	$S_{22}$		-12		dB	$f > 3 \text{ GHz}$
1 dB compression	$P_{1dB}$		+6		dBm	$500 \text{ kHz} \leq f \leq 1 \text{ GHz}$
	$P_{1dB}$		+4		dBm	$1 \text{ GHz} < f \leq 3 \text{ GHz}$
	$P_{1dB}$		-1		dBm	$f > 3 \text{ GHz}$
reverse isolation	$S_{12}$		-80		dB	
3 <sup>rd</sup> order intercept	OIP3		+23		dBm	$500 \text{ kHz} \leq f \leq 1 \text{ GHz}$
			+16			$1 \text{ GHz} < f \leq 3 \text{ GHz}$
			+10			$f > 3 \text{ GHz}$
noise figure	NF		10		dB	$f \geq 5 \text{ MHz}$
channel isolation	$S_{32}$		-80		dB	$f \leq 3 \text{ GHz}$
output isolation	$S_{12}$		-35		dB	
RF input power	$P_{RF}$			+15	dBm	no damage
maximum DC voltage	$U_{DC}$			15	V	all RF ports
ESD discharge resistor	$R_{ESD}$		4.7		k $\Omega$	all RF ports
RF connectors	$X_{RF}$	SMA female				
trigger input	$X_{TRIG}$	BNC female				internal 1 k $\Omega$ pull up, active high
trigger level	$U_{TRIG}$	TTL (0 / 5 V)				
trigger offset	$t_{O\_FALL}$		6.5		$\mu\text{s}$	50% trigger → 50% RF falling edge, note 2
	$t_{O\_RISE}$		1.1		$\mu\text{s}$	50% trigger → 50% RF rising edge, note 2
switch rise time	$t_{RISE}$		1		$\mu\text{s}$	10% → 90% RF
switch fall time	$t_{FALL}$		2		$\mu\text{s}$	90% → 10% RF

Note 1: tested at  $P_{out} 2 \times -10\text{dBm}$ ;  $\Delta f = 2 \text{ MHz}$

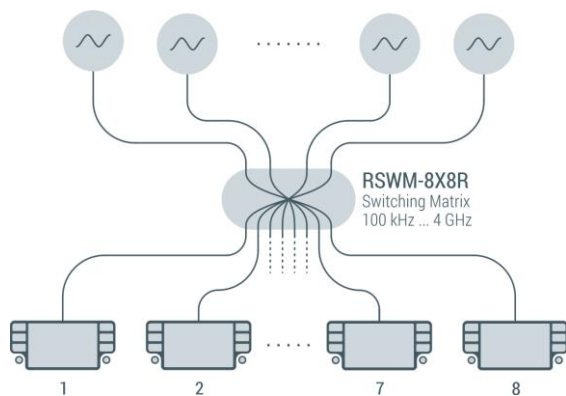
Note 2: capacitive load at 'TRIGGER IO' Port  $\leq 100\text{pF}$ , trigger mode "OUT"

## Common Specification

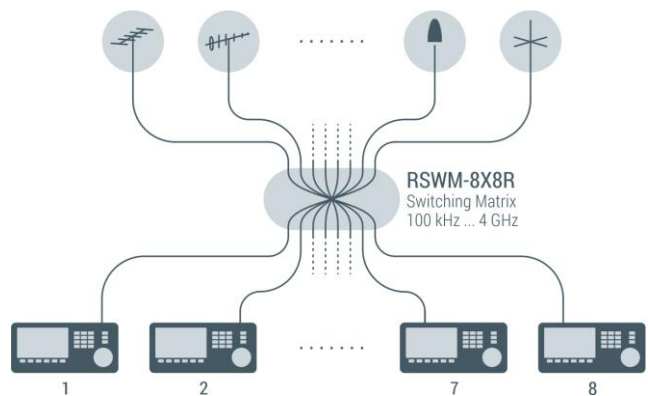
Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
power supply	U <sub>AC</sub>	90	230	260	V	50 / 60 Hz AC
power consumption	P <sub>AC</sub>		100		W	
power socket	X <sub>AC</sub>	IEC-60320 C14				country specific mains cable
remote ports	LAN	10/100 BaseT		TCP/IP		RJ45 on rear side
	USB	2.0 (high speed)				USB type B
<b>Dimensions and weight</b>						
dimensions	W x H x D	approx. 482 x 44 x 455			mm	19" 1U, without connectors and handles
weight	m		5		kg	
<b>Environment conditions</b>						
operating temp. range	T <sub>o</sub>	+5		+45	°C	
storage temp. range	T <sub>s</sub>	-40		+70	°C	
<b>Product conformity</b>						
Electromagnetic compatibility	EU: in line with EMC directive (2014/30/EC)				applied harmonized standards: EN61326-2-1, (for use in control and laboratory environments), EN55035, EN55032, EN61000-3-2, EN61000-3-3	
Electrical safety	EU: in line with low voltage directive (2014/35/EC)				applied harmonized standard: EN 61010-1	
<b>Ordering information</b>	RSWM-8X8LR		2103.4552.1			

## Application Examples

The RSWM-8X8LR is versatile, catering to radio monitoring applications and research and development test environments. With the RSWM products, customers can easily route input signals to any device output. As illustrated, the input can be connected to various signal sources or antennas:



*Car Infotainment Test with different GNSS Position Data*





*Wideband Radio Monitoring*

## Graphical User Interface

The graphical user interface (GUI) enables users to define custom labels tailored to their specific applications, making input selection more contextually meaningful.

### Matrix Setup Interface


RSWM-NX8
Switching Matrix
Setup
Diagnostic
Tools
System
User


**Matrix Setup**

**Labels**

**Input Labels**

X11	Input No 1
X12	Input No 2
X13	Input No 3
X14	Input No 4
X15	Input No 5
X16	Input No 6
X17	Input No 7
X18	Input No 8

**Output Labels**


X21	Output No 1
X22	Output No 2
X23	Output No 3
X24	Output No 4
X25	Output No 5
X26	Output No 6
X27	Output No 7
X28	Output No 8


**Power Up State**

Matrix state after powering up the device

PRESET
SHUTDOWN

### Matrix Control Interface


RSWM-NX8
Switching Matrix
Setup
Diagnostic
Tools
System
User



**Matrix Control**

Save Preset
Restore Preset
All OFF

Output No 1 X21	OFF - No Input	Output No 5 X25	OFF - No Input
Output No 2 X22	OFF - No Input	Output No 6 X26	OFF - No Input
Output No 3 X23	OFF - No Input	Output No 7 X27	OFF - No Input
Output No 4 X24	OFF - No Input	Output No 8 X28	OFF - No Input


2023-08-28 10:37:53

Becker Nachrichtentechnik GmbH ■ Kapellenweg 3 ■ 53567 Asbach - Germany ■ [www.becker-rf.com](http://www.becker-rf.com)

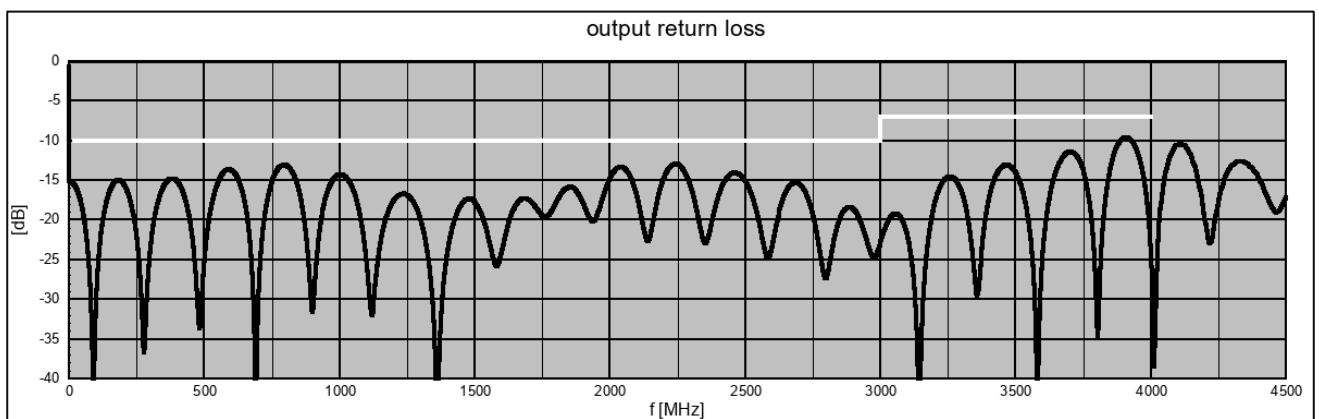
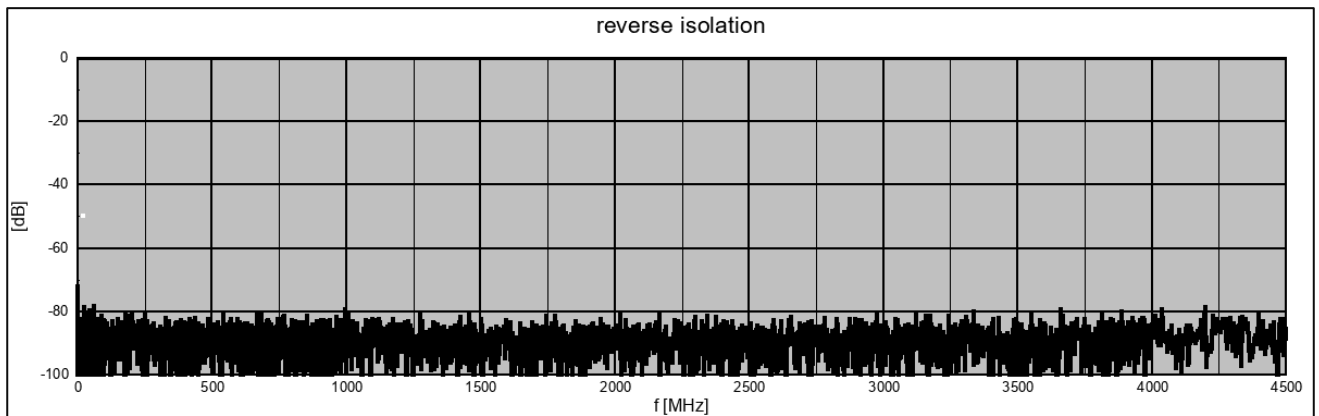
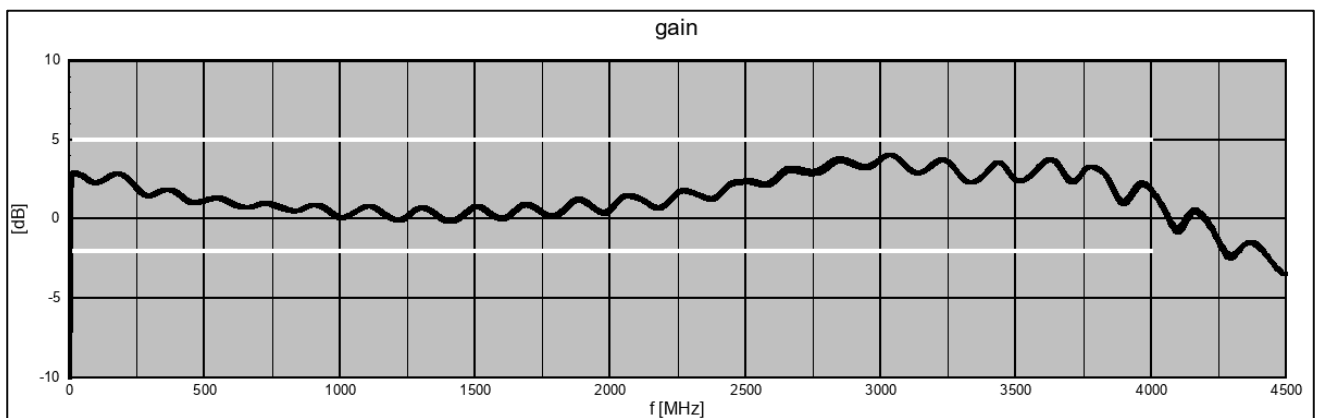
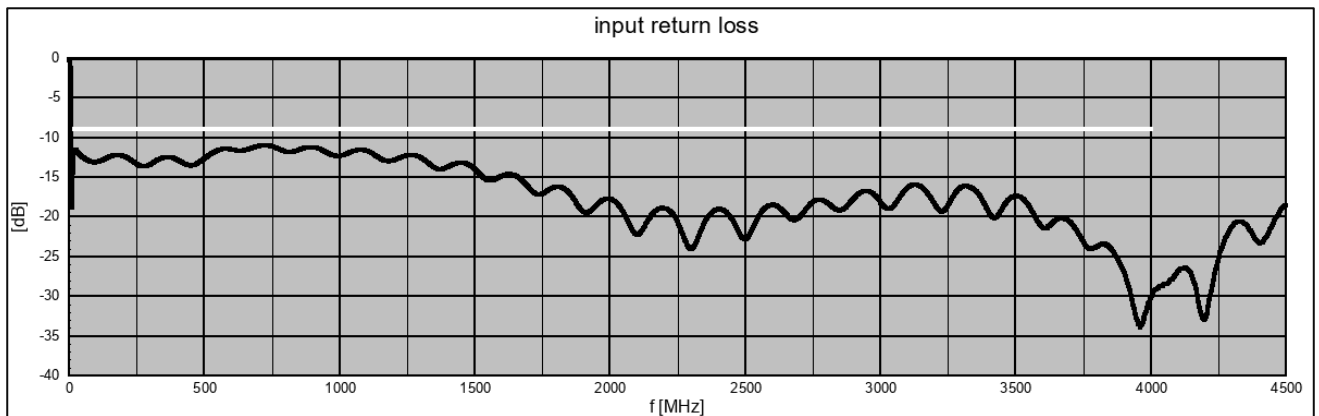


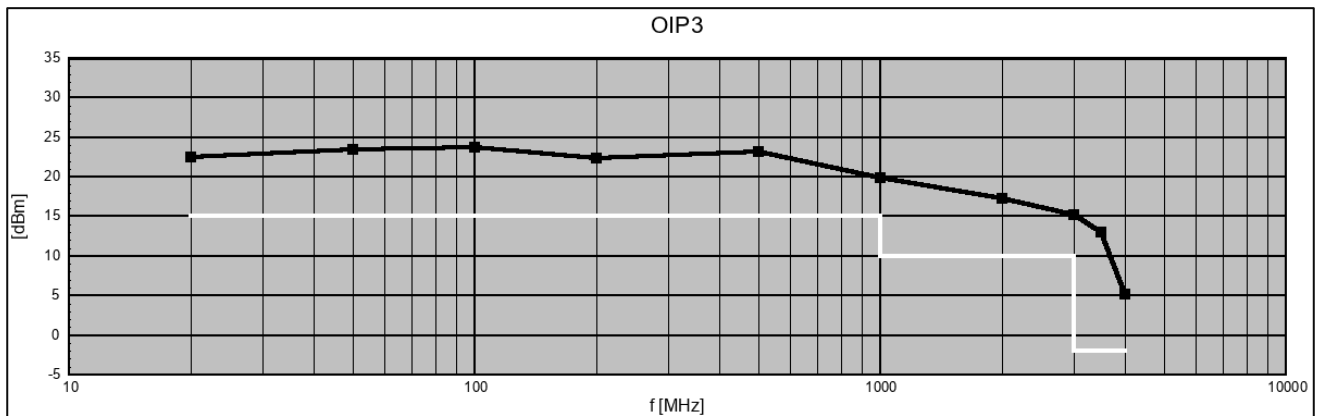
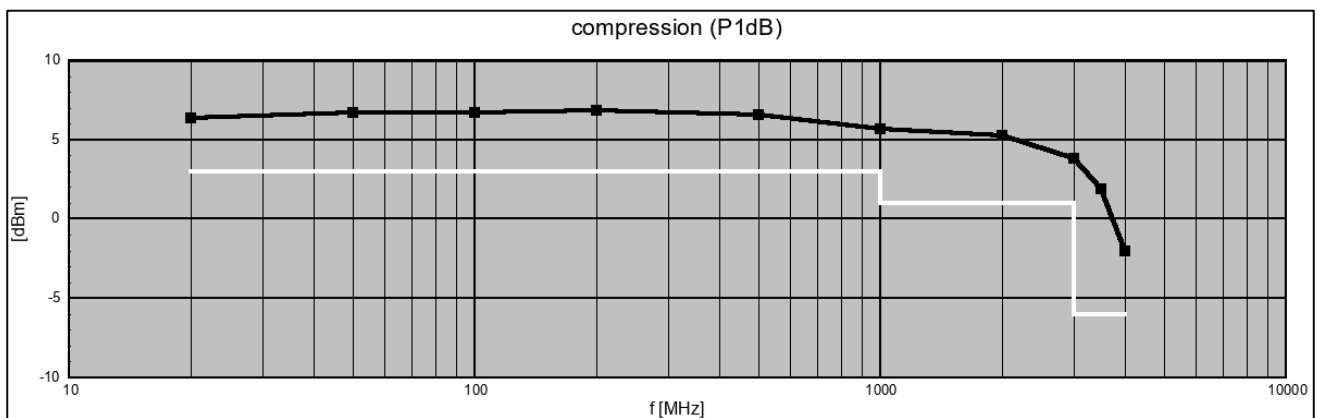
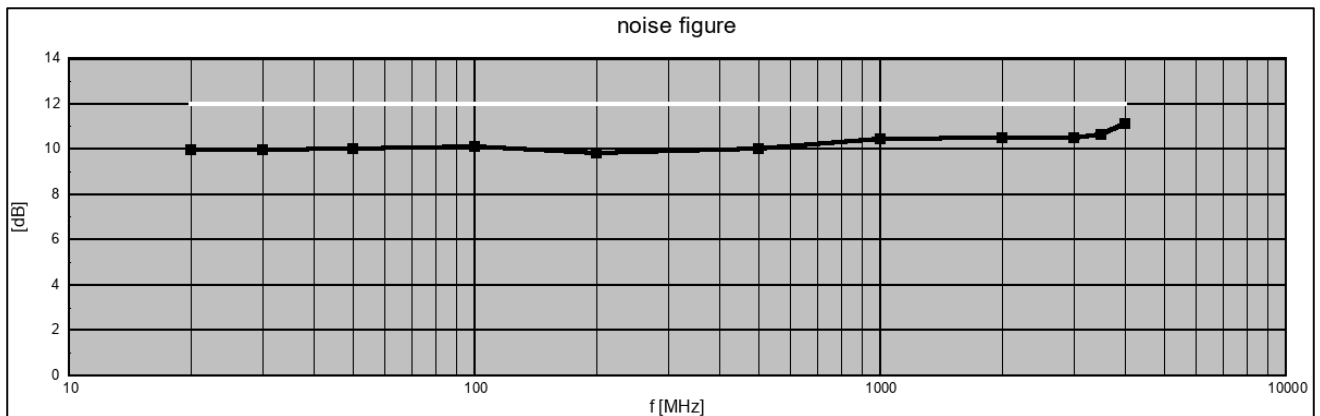
Quality Made in Germany

Subject to change in specification and design without notice.  
Released Version 1.00 – September 2023



RoHS compliant in accordance with  
EU Directive 2015/863

**S-Parameters***typical responses*

**Dynamic Range***typical responses*

## Appearances

### Front View



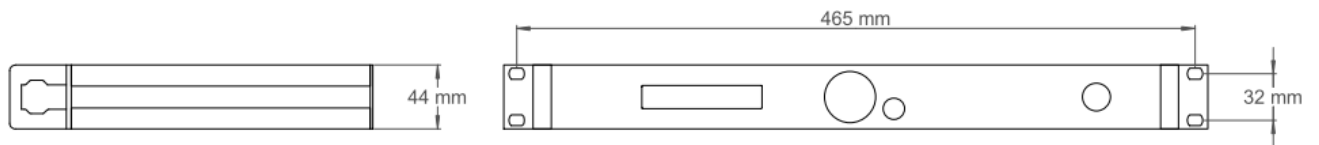
### Rear View

#### Variant with AC-Supply

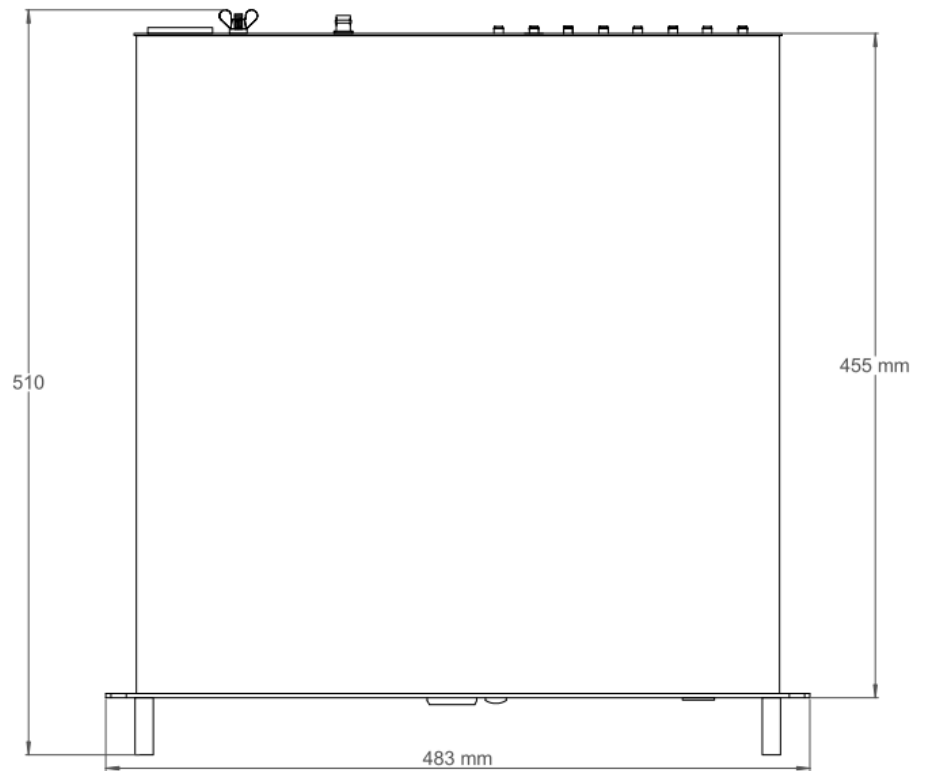


#### Variant with DC-Supply



**Dimensions**

all dimensions in mm  
± 2 mm





## Related Products

Further switching matrices

Product	P/N	Description
RSWM-4X4LR	1205.4402.X	Wideband Non-Blocking 4X4 Switching Matrix 100 kHz ... 4000 MHz LAN remote interface with SNMPv2 trap function
RSWM-4X8LR	2103.4452.X	Wideband Non-Blocking 4X8 Switching Matrix 100 kHz ... 4000 MHz LAN remote interface with SNMPv2 trap function
RSWM-8X8LR	2103.4552.X	Wideband Non-Blocking 8X8 Switching Matrix 100 kHz ... 4000 MHz LAN remote interface with SNMPv2 trap function
RSWM-4X4R	1205.4102.X	High-Dynamic Non-Blocking 4X4 Switching Matrix 100 kHz ... 4000 MHz LAN remote interface with SNMPv2 trap function
RSWM-4X8R	2103.4302.X	High-Dynamic Non-Blocking 4X8 Switching Matrix 100 kHz ... 4000 MHz LAN remote interface with SNMPv2 trap function
RSWM-8X8R	2103.4502.X	High-Dynamic Non-Blocking 8X8 Switching Matrix 100 kHz ... 4000 MHz LAN remote interface with SNMPv2 trap function
RSWM-4X4ER	1205.4202.X	Extremely Wideband Non-Blocking 4X4 Switching Matrix 20 ... 8000 MHz LAN remote interface with SNMPv2 trap function
RSWM-4X8ER	2103.4402.X	Extremely Wideband Non-Blocking 4X8 Switching Matrix 20 ... 8000 MHz LAN remote interface with SNMPv2 trap function
RSWM-8X8ER	2103.4602.X	Extremely Wideband Non-Blocking 8X8 Switching Matrix 20 ... 8000 MHz LAN remote interface with SNMPv2 trap function
BSWM-4X4ER	1205.4502.X	4X4 Bidirectional Blocking Wideband Switching Matrix 100 kHz ... 8000 MHz LAN remote interface with SNMPv2 trap function
BSWM-4X8ER	2103.4702.X	4X8 Bidirectional Blocking Wideband Switching Matrix 100 kHz ... 8000 MHz LAN remote interface with SNMPv2 trap function
BSWM-8X8ER	2103.4802.X	8X8 Bidirectional Blocking Wideband Switching Matrix 100 kHz ... 8000 MHz LAN remote interface with SNMPv2 trap function