

WSDU-1X8L

High Dynamic 8 Way Multicoupler Module, 100 kHz ... 4000 MHz

Features

- wideband
- high dynamic
- lossless in signal distribution

Applications

- Broadcast and GNSS distribution
- AM, FM, IBOC, DAB, DVB-T, SDARS
- GNSS: GPS, Galileo, GLONASS, Beidou
- R&D (Research & Development)
- Product validation
- Production

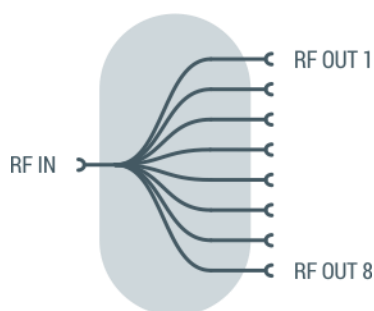


Scope

The WSDU-1X8L is a wideband signal distribution unit consisting of an active multicoupler. The module operates in the frequency range 100 kHz to more than 4000 MHz. The slot-in module is foreseen for integration into SR6-11C system platform.

Principal Block Diagram

The WSDU-1X8L offers one input that distributes signals to eight equal outputs.



Distribution without Loss in Level

The RF input signals are amplified using broadband low-noise amplifiers with a wide dynamic range. As a result, the distributed input signal is made available at the eight outputs with approx. 3 dB gain. RF input and the RF outputs are SMA female connector type, located on the rear side of the module.

Wideband Distribution Systems

The wide frequency range makes WSDU-1X8L ideally suited for applications such as research and development (R&D) or production where broadcast and navigation signals must be distributed to many devices under test (DUTs).

High Output-to-Output Isolation

WSDU-1X8L features a high output-to-output isolation. Thus, changing the load at an output causes nearly no effects to the power level at the other outputs.

Rugged design

WSDU-1X8L is housed in an aluminium shielding cover which avoids influences of radio signals of the environment to the internal RF signals.

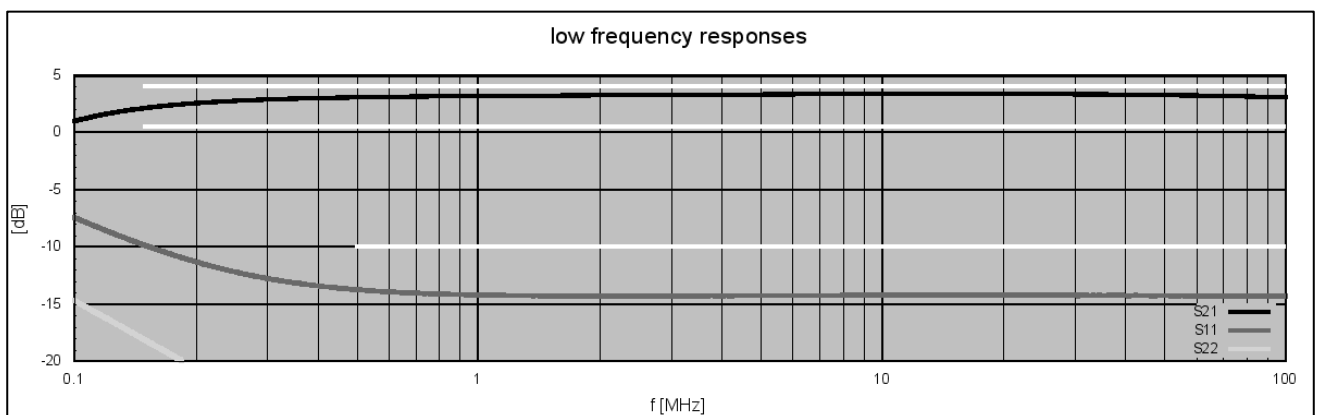
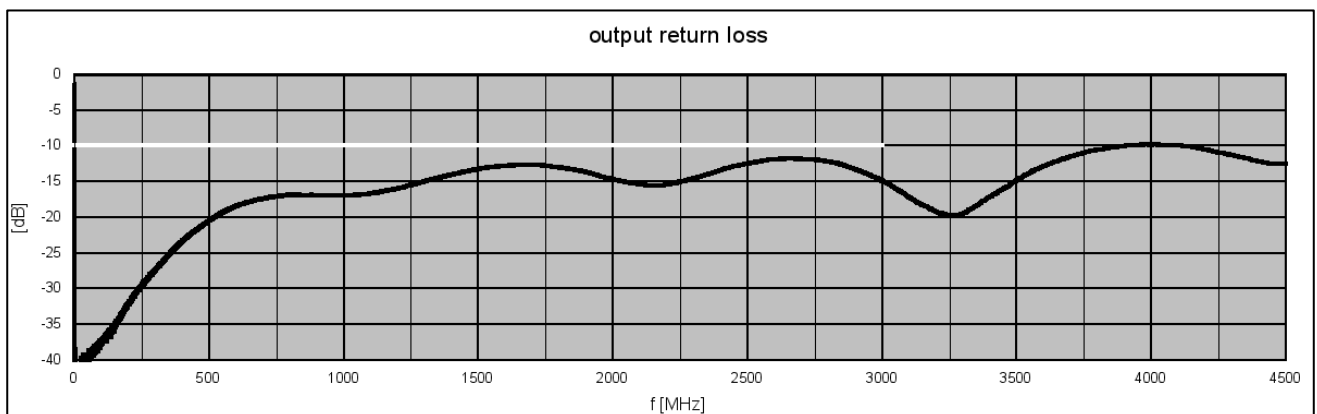
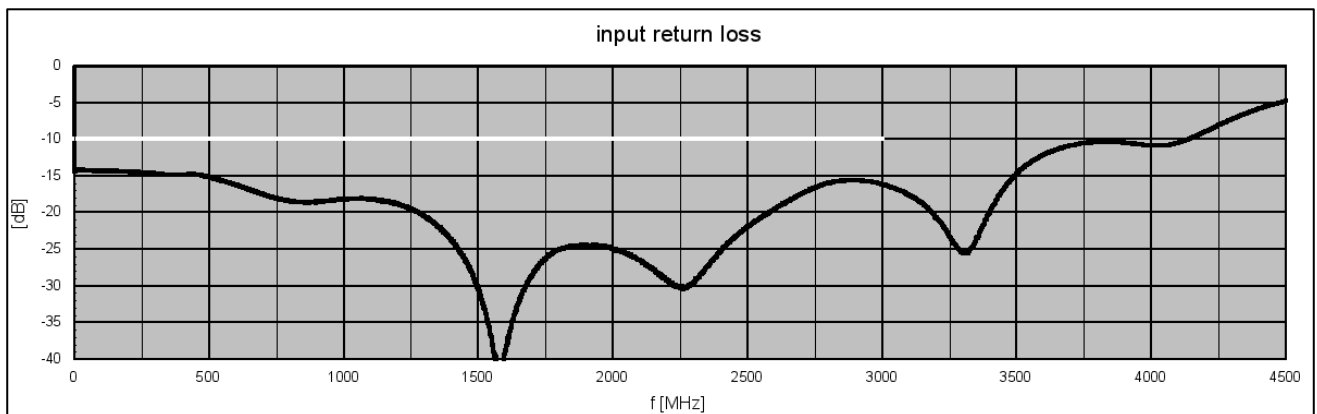
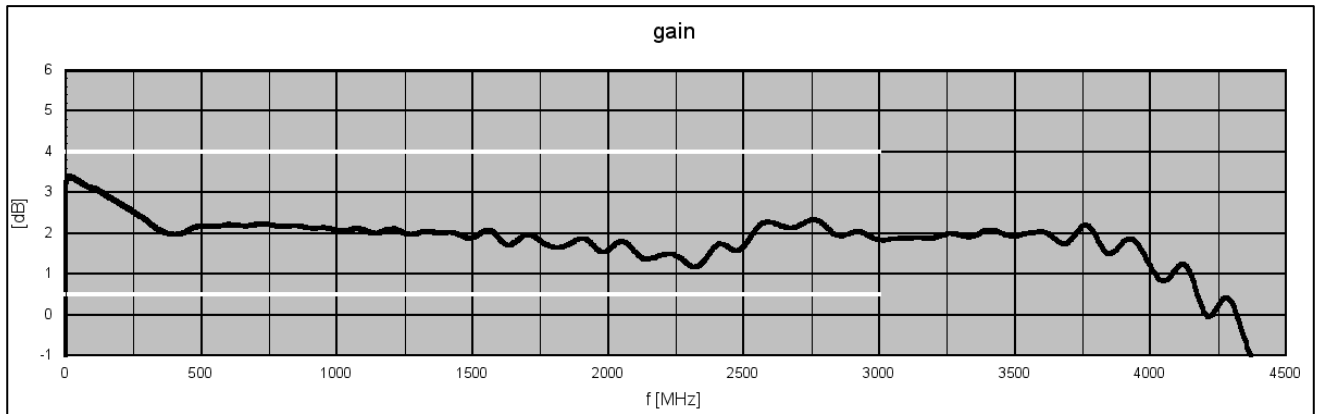
RF Specification

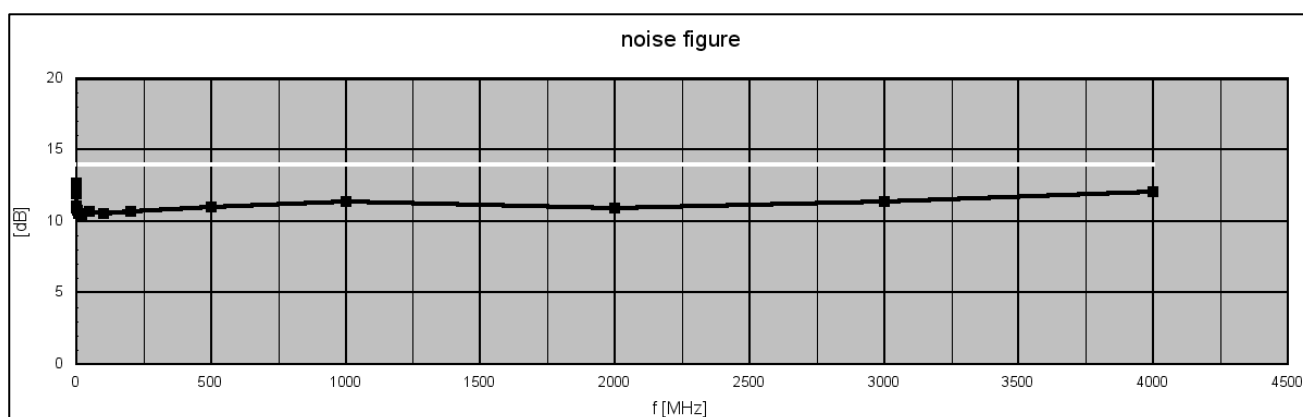
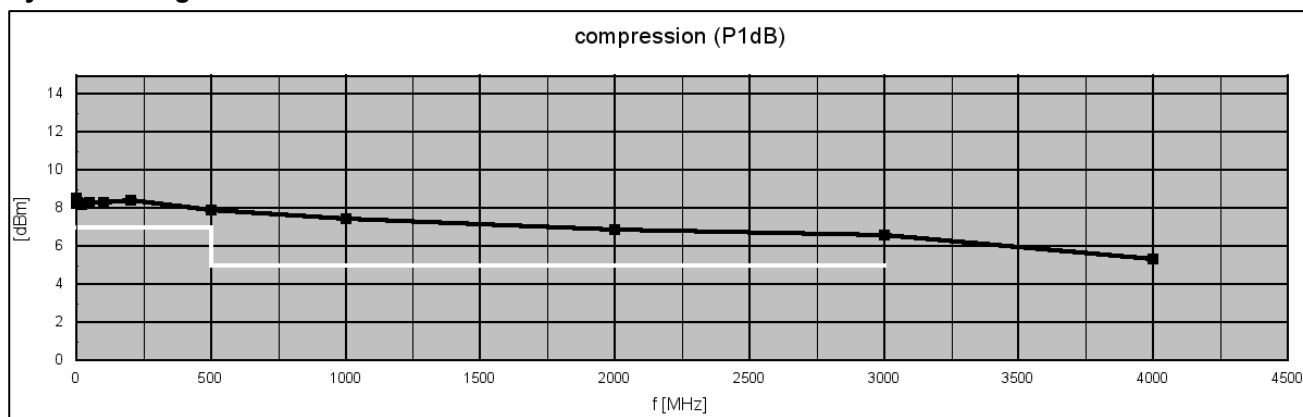
Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
impedance	Z_{IN}/Z_{OUT}		50		Ω	
low frequency	f_{MIN}		100	150	kHz	
high frequency	f_{MAX}	4000	4500		MHz	
gain	S_{21}	0.5	2.5	4.0	dB	$f \leq 3000$ MHz
input return loss	S_{11}		-14	-10	dB	$500 \text{ kHz} \leq f \leq 3000$ MHz
output return loss	S_{22}		-20	-10	dB	$f \leq 3000$ MHz
reverse isolation	S_{12}		-90		dB	
output isolation	S_{23}		-25	-23	dB	neighbouring outputs ($d=1$)
	S_{23}		-57		dB	distance > 1
1 dB compression	P_{1dB}	+7	+8		dBm	$f \leq 500$ MHz
	P_{1dB}	+5	+7			$500 \text{ MHz} < f \leq 3000$ MHz
3 rd order intercept	$OIP3^1$	+16	+20		dBm	$f = 1000$ MHz
	$OIP3^1$	+15	+18		dBm	$f = 2000$ MHz
	$OIP3^1$	+13	+16		dBm	$f = 3000$ MHz
noise figure	NF		11	14	dB	
maximum input power	$P_{in \max}$			+15	dBm	CW, no damage
DC voltage	U_{DC}			20	V	input and outputs
ESD discharge resistor	R_{ESD}		4.7		k Ω	input and outputs
RF connectors	X_{RF}	SMA female				

Note 1: frequency space 100 MHz

Common Specification

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
power supply	U_{DC}	23.5		24.5	V	DC
power consumption	P_{DC}		6		W	
dimensions	W x H x D	approx. 30 x 262 x 197			mm	6 U, 6HP
weight	m		1.2		kg	
operating temp. range	T_o	+5		+55	$^{\circ}\text{C}$	ambience
storage temp. range	T_s	-40		+70	$^{\circ}\text{C}$	
ordering information		WSDU-1X8L		1807.6100.1		

S-Parameters (typical responses)

Dynamic Range

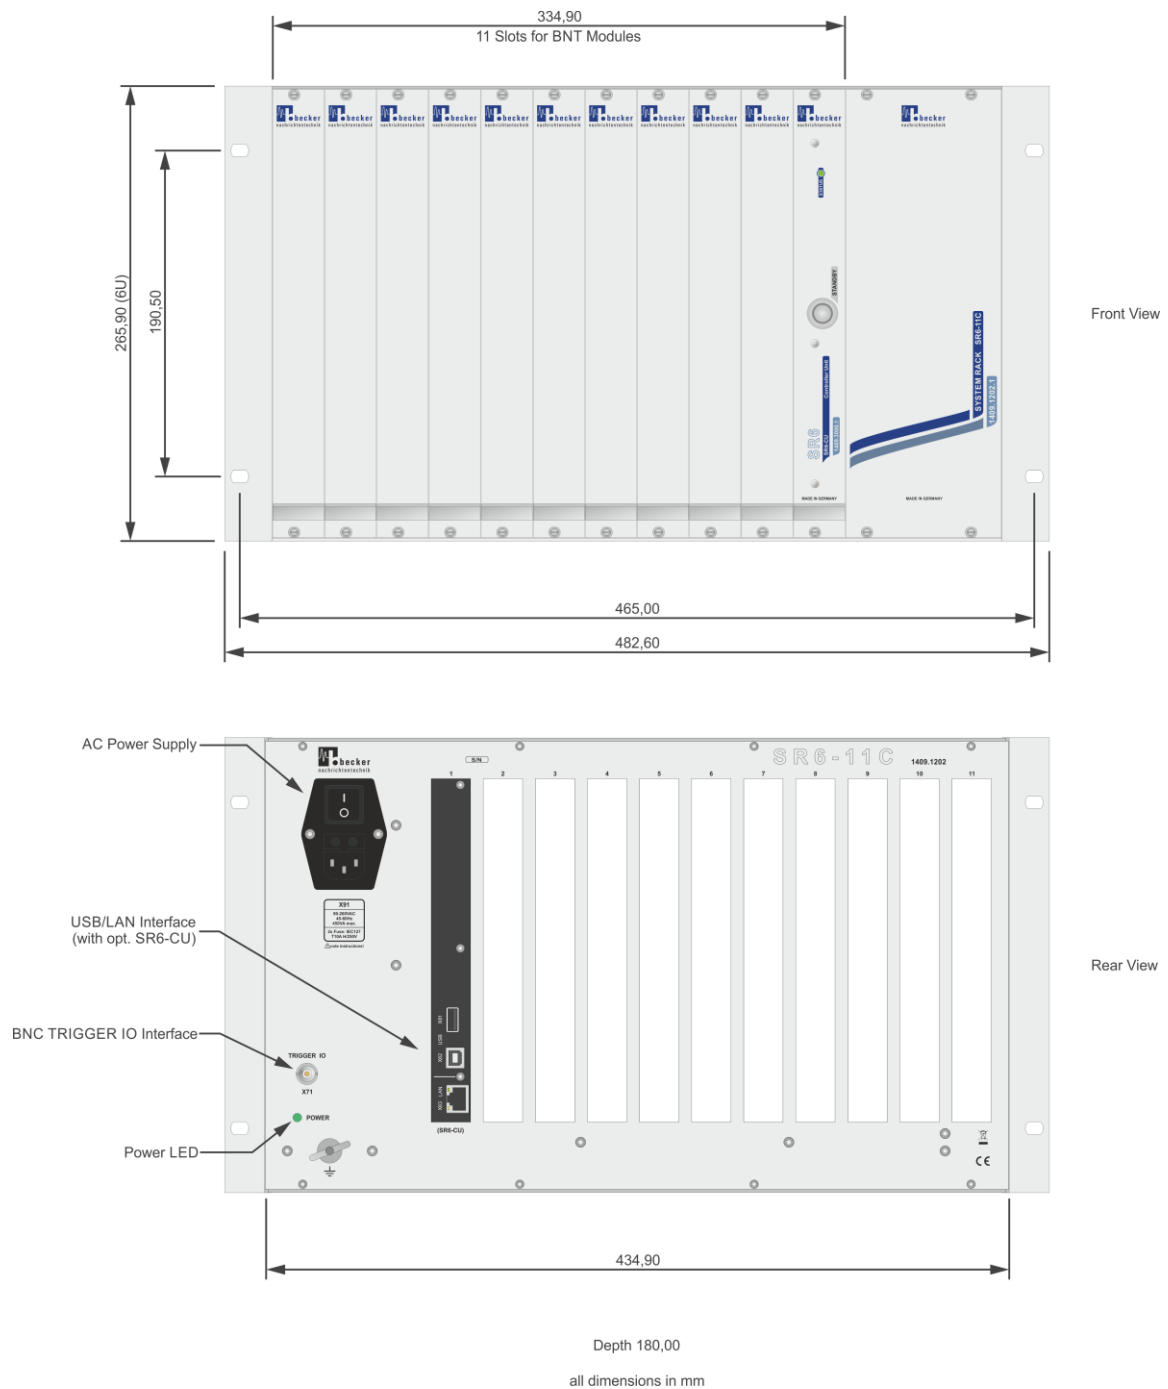
SR6-11C System Platform

The WSDU-1X8L module is foreseen for the integration into the SR6-11C system platform. 11 slots in the SR6-11C can be used for modules like RF switches, matrices, multicouplers, attenuators, BIAS-Ts, level detectors, bi-directional

splitters/combiners for signal conditioning and a controller unit. For the module health monitoring a SR6-CU controller unit is required.



Dimensions of SR6-11C System Platform



Appearances

Front View



Rear View



SR6-11C System Platform

Related Products

[Active RF Multicouplers](#)

[Active RF Signal Combiners](#)

[Passive RF Signal Splitters/Combiners](#)

[Modular RF System Platform](#)

