

## 8 Port N Connector RF Terminal with Labelling Strips

### Features

- mountable in 19" systems
- labelling strips on front panel
- 8 port N to SMA adapter
- 50 Ohm impedance

### Applications

- RF terminal port in 19" systems
- R&D
- production



### At a Glance

CP-N is an eight port RF terminal for use in professional RF systems. It has 1 U height and is designed for installation in 19" systems. It is a useful transfer point between RF interfaces of systems and facility infrastructures with thick and rigid RF cables.

For giving names of the connection point CP-N has a labelling strip on the front side. CP-N offers eight SMA female to N female adapters.

### RF Specification

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
impedance	$Z_{in} / Z_{out}$		50		Ohm	
low frequency	$f_{min}$			DC		
high frequency	$f_{max}$	8000			MHz	
number of ports	N	8				
dimensions	W x H x D	approx. 482 x 44 x 30			mm	19", 1 U
weight	m		500		g	
RF connector		N female				front side
		SMA female				rear side
operating temp. range	$T_o$	+5		+40	°C	ambiance
storage temp. range	$T_s$	-40		+70	°C	
ordering information		CP-N	P/N: 1202.0708.1			

## Appearances




Front View



Rear View

## Dimensions

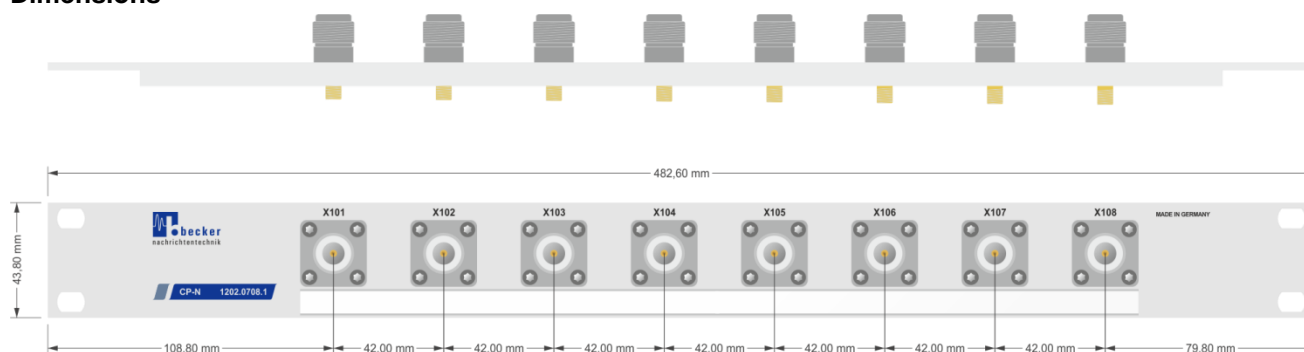

## Related Products

Product	Description	P/N
CP-N	8 Port N Connector RF Terminal with Labelling Strips	1202.0708.1
RFT-N	RF Terminal with N Female Connector	1202.0608.1