

RF Terminal with N Female Connector

Features

- rugged for professional use
- suitable for installation in standard cable channel boxes
- labelling strip

Applications

- RF terminal at workplaces
- signal distributions
- receiving systems
- production



At a Glance

RFT-N is a RF terminal for use in professional RF systems. Fields of application are RF terminals at workplaces for service, test departments, research and development (R&D) also in production and receiving systems.

RFT-N is suitable for mounting in standard cable channel boxes. It has a labelling strip on the front side.




RF Specification

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
impedance	Z_{in} / Z_{out}		50		Ohm	
low frequency	f_{min}			DC		
high frequency	f_{max}	8000			MHz	
dimensions	W x H x D	approx. 80 x 80 x 35			mm	
mounting depth		approx. 15			mm	
weight	m		150		g	
operating temp. range	T_o	+5		+40	°C	ambiance
storage temp. range	T_s	-40		+70	°C	
ordering information		RFT-N	P/N: 1202.0608.1			

Appearance



Dimensions

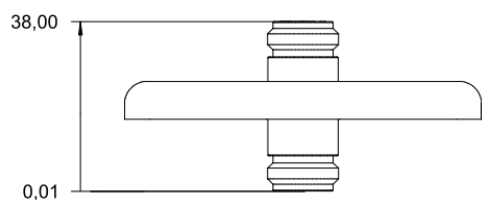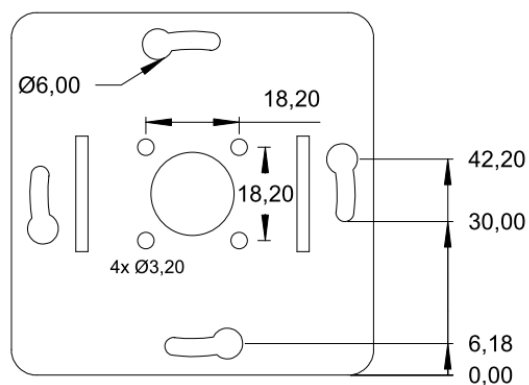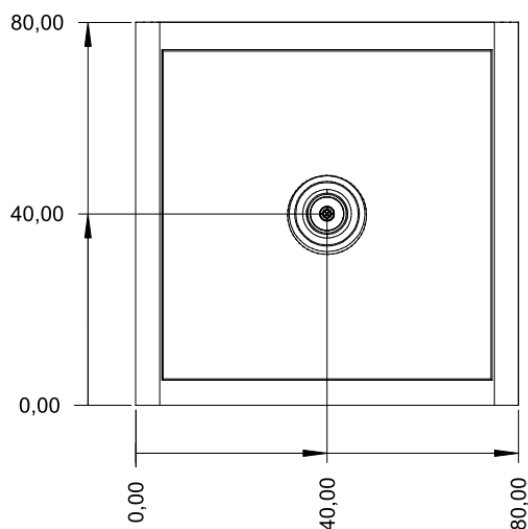

Related Products

Product	Description	P/N
CP-N	8 Port N Connector RF Terminal with Labelling Strips	1202.0708.1
RFT-N	RF Terminal with N Female Connector	1202.0608.1