

WSDU-1X8ER

Extremely Wideband 1 to 8 Signal Distribution Unit 20 ... 8000 MHz

Features

- extremely wideband
- high dynamic
- lossless signal distribution
- variant with device monitoring/
SNMP function
- variants with AC or DC supply

Applications

- antenna signal distributions
- radio monitoring
- direction finding
- R&D

Scope


WSDU-1X8ER is an extremely wideband multicoupler that distributes signals from one common input to 8 outputs. The frequency range extends from 20 MHz to more than 8000 MHz. The device is available in variants with AC or DC power supply.

Lossless 1 to 8 Signal Distribution

The RF input the signal is amplified by using innovative broadband low-noise amplifiers with a wide dynamic range -weak signals are linearly amplified even if they occur next to signals with very strong levels. As a result, the distributed input signal is made available at the eight outputs of the multicoupler without any loss in level. The hardware structure of the distribution offers best phase and amplitude balance performance. All RF inputs and outputs have N female connectors.

Variants for AC and DC Supply

WSDU-1X8ER is available in two variants for supply the unit with AC or DC power. Both variants cover a wide voltage supply range.

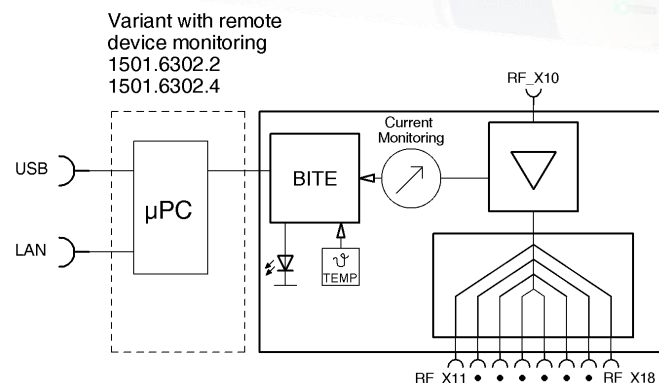

Device Monitoring

WSDU-1X8ER device is equipped with a built-in device monitoring capability which offers optical signalization of the device health as standard.

For remote monitoring a variant with LAN and USB remote interfaces is available. Via the remote interfaces information about operating points of the internal wideband amplifier stages, the module temperature and the device identification can be queried in form of ASCII strings.

The variant with remote monitoring supports SNMP (simple network management protocol) which enables monitoring without any effort, even in complex environments.

The WSDU-1X8ER is able to identify failures and to inform the supervising system automatically. The LAN remote interface offers SNMPv2 trap function.

RF Specification

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
impedance	Z_{in} / Z_{out}		50		Ohm	
low frequency	f_{min}		15	20	MHz	
high frequency	f_{max}	8000	8500		MHz	
gain	S_{21}	3	5	7	dB	$f \leq 1$ GHz
	S_{21}	0	3	7	dB	$1 \text{ GHz} < f \leq 7.5$ GHz
	S_{21}	-1	2	5	dB	$f > 7.5$ GHz
gain flatness	ΔS_{21}		± 2		dB	
input return loss	S_{11}		-16	-9	dB	
output return loss	S_{22}		-17	-11	dB	$f \leq 6.5$ GHz
	S_{22}		-13	-9	dB	$f > 6.5$ GHz
reverse isolation	S_{12}		-90	-65	dB	
output isolation	S_{23}		-30	-20	dB	distance = 1
	S_{23}		-50		dB	distance > 1
amplitude balance	dS_{23}		± 0.4		dB	
phase balance	φ_{23}		± 2		deg	
1 dB compression	P_{1dB}	+3	+6		dBm	$f \leq 3$ GHz
	P_{1dB}	+2	+5		dBm	$f > 3$ GHz
3 rd order intercept	$OIP3^1$	+15	+19		dBm	$f \leq 1.5$ GHz
	$OIP3^1$	+12	+16		dBm	$1.5 \text{ GHz} < f \leq 4$ GHz
	$OIP3^1$	+10	+14		dBm	$f > 4$ GHz
2 nd order intercept	$OIP2^2$	+33	+38		dBm	40/60 MHz
	$OIP2^2$	+28	+33		dBm	1000/1100 MHz
	$OIP2^2$	+21	+26		dBm	3000/3100 MHz, 3900/4000 MHz
noise figure	NF		11	13	dB	$f < 100$ MHz
	NF		9.5	11	dB	$f \geq 100$ MHz
input power	P_{in}			+10	dBm	CW, no damage
maximum DC voltage	U_{DC}			20	V	all RF ports
ESD discharge resistor	R_{ESD}		4.7		k Ω	all RF ports
RF connectors	NF	N female				

Note 1: $P_{in} = 2 \times -10$ dBm, specified and tested for $\Delta f = 50$ MHz

Note 2: $P_{in} = 2 \times -10$ dBm, specified and tested for mentioned frequency pairs





OPIP2 & OPIP3 values are the average value of the upper and lower intermodulation distortion.







Common Specification

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
AC supply variant						
voltage supply range	U _{AC}	90	230	260	V	50 / 60 Hz AC
power consumption	P		9	50	W	
power socket	X _{AC}	IEC-60320 C14				country specific mains cable
DC supply variant						
voltage supply range	U _{DC}	18	24	28	V	
current consumption	I _{DC}		190		mA	@ 24 V
power socket	X _{DC}	3 pole XLR male				
Dimensions and weight						
dimensions	W x H x D	approx. 482 x 44 x 265			mm	19" 1 U, without connectors and handles
weight	m		3.4		kg	
Environment conditions						
operating temp. range	T _o	+5		+45	°C	
storage temp. range	T _s	-40		+70	°C	
Remote interfaces (variant with remote device monitoring)						
remote ports	LAN	10/100BaseT	TCP/IP			RJ45
	LAN	SNMPv2 trap function				
	USB	2.0 (high speed)				USB type B
Product conformity						
Electromagnetic compatibility	EU: in line with EMC directive (2014/30/EC)				applied harmonized standards: EN 61326-1 (for use in industrial environment), EN 61326-2-1, EN 55011 (class B), EN 61000-3-2, EN 61000-3-3	
Electrical safety	EU: in line with low voltage directive (2014/35/EC)				applied harmonized standard: EN 61010-1	
Ordering information	WSDU-1X8ER	P/N: 1501.6302.1		variant with AC supply		
	WSDU-1X8ER	P/N: 1501.6302.3		variant with DC supply		
	WSDU-1X8ER	P/N: 1501.6302.2		AC supply with Device Monitoring		
	WSDU-1X8ER	P/N: 1501.6302.4		DC supply with Device Monitoring		

S-Parameters (typical responses)

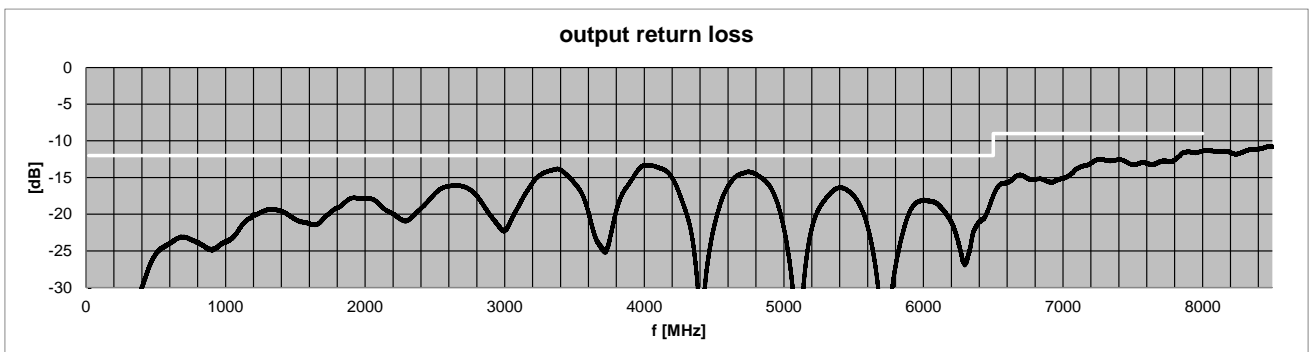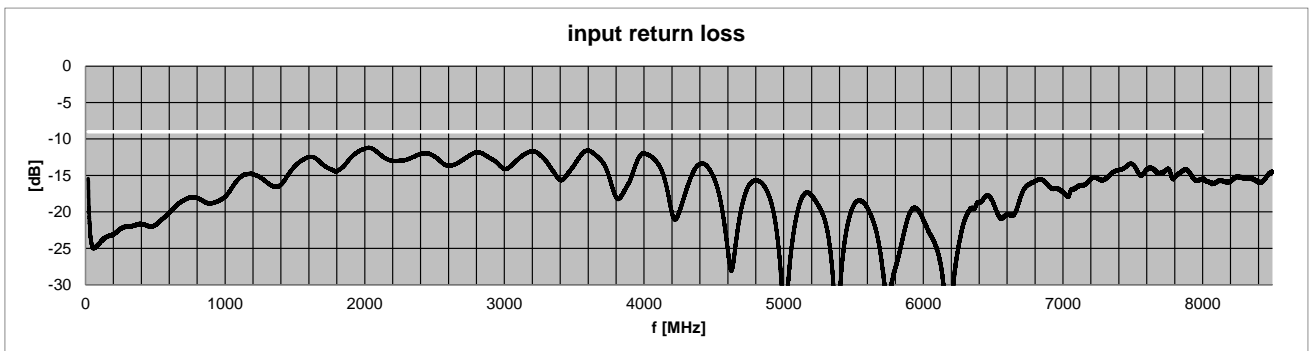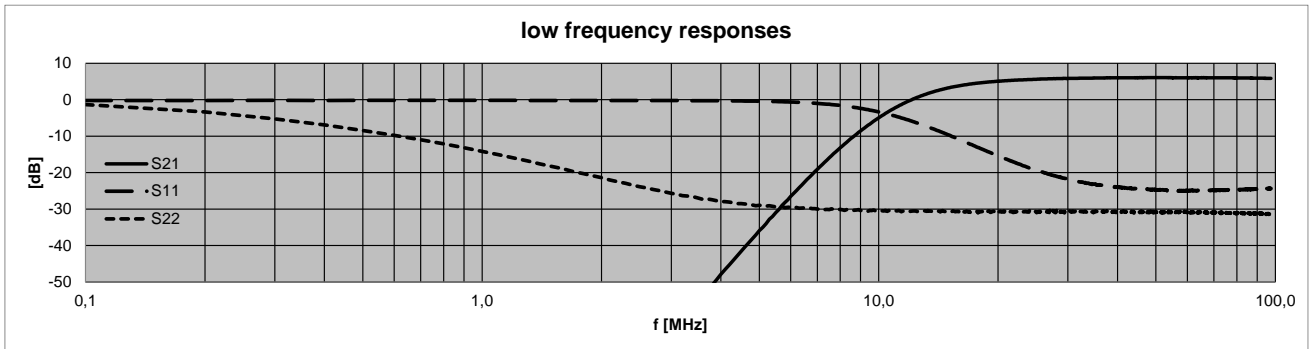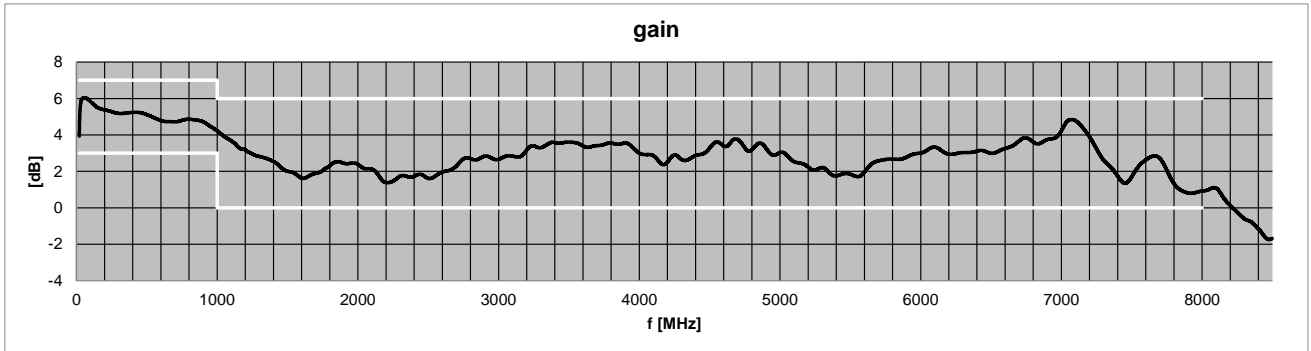


Dynamic Range (typical responses)

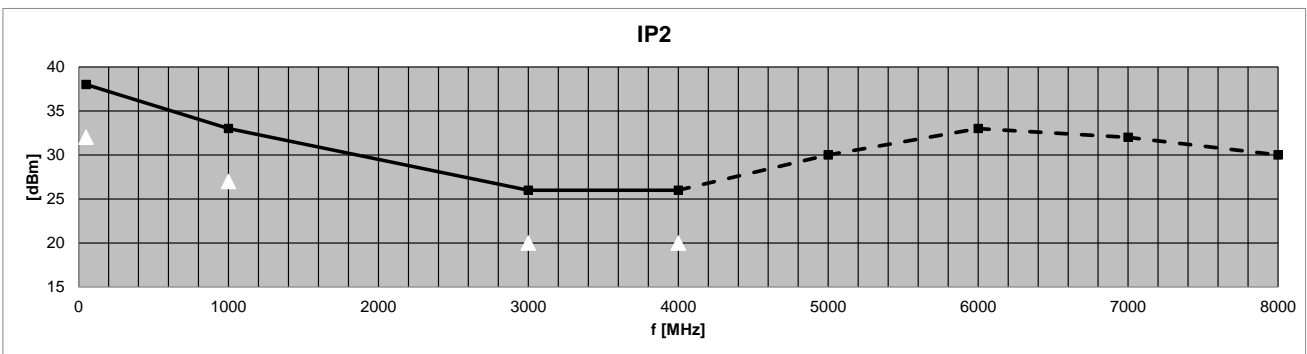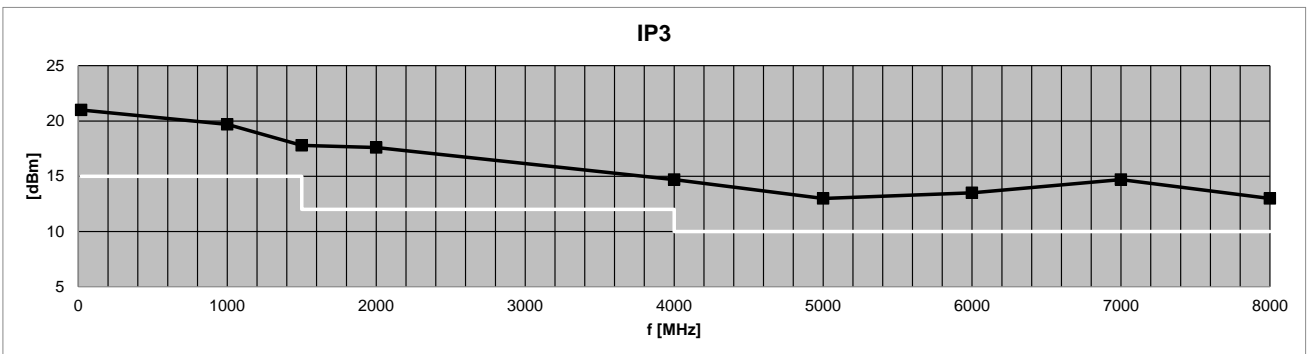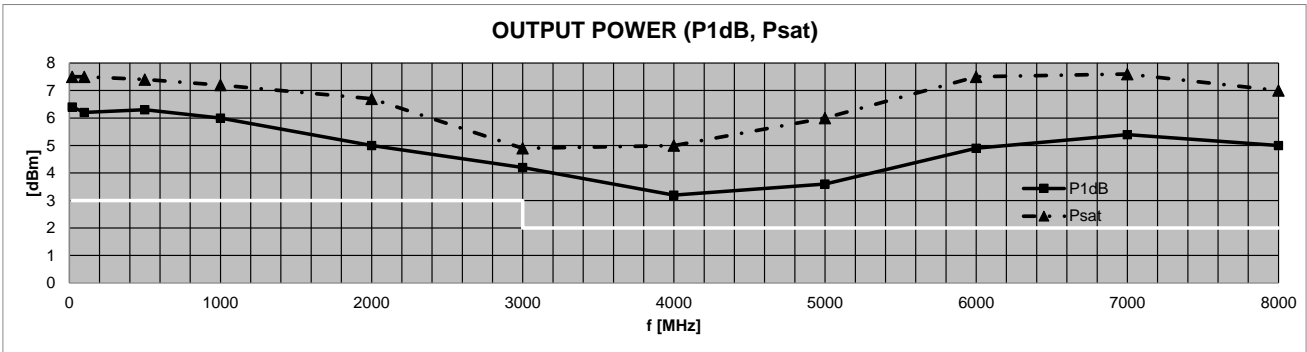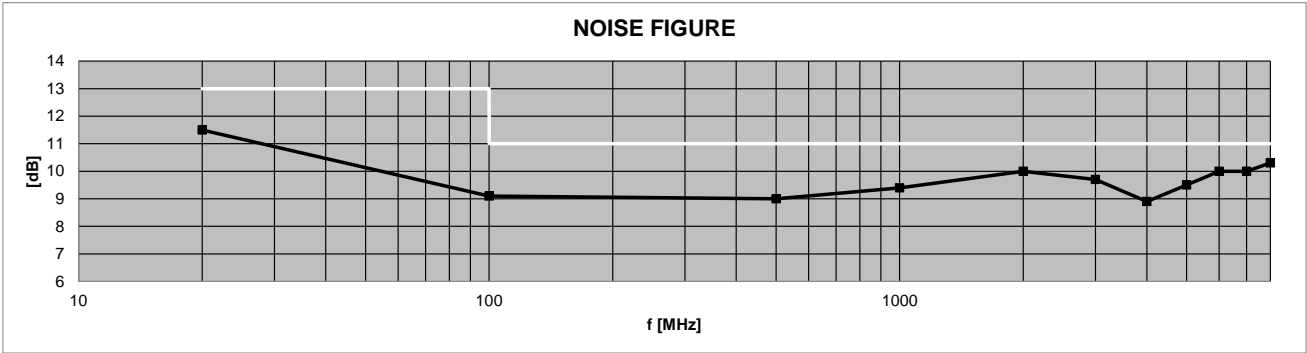


Output Balances (typical responses)

4/29/2019 6:03:52 PM
1311.6010K42-101511-rL

- | | | | | |
|-------------|-----------------------------------|-------------|-------------------------------|---|
| Trc2 | — S21 dB Mag 0.2 dB/ Ref 0 dB Cal | Mem4[Trc2] | — S21 dB Mag 0.2 dB/ Ref 0 dB | 1 |
| Mem6[Trc2] | — S21 dB Mag 0.2 dB/ Ref 0 dB | Mem8[Trc2] | — S21 dB Mag 0.2 dB/ Ref 0 dB | |
| Mem10[Trc2] | — S21 dB Mag 0.2 dB/ Ref 0 dB | Mem12[Trc2] | — S21 dB Mag 0.2 dB/ Ref 0 dB | |
| Mem14[Trc2] | — S21 dB Mag 0.2 dB/ Ref 0 dB | | | |

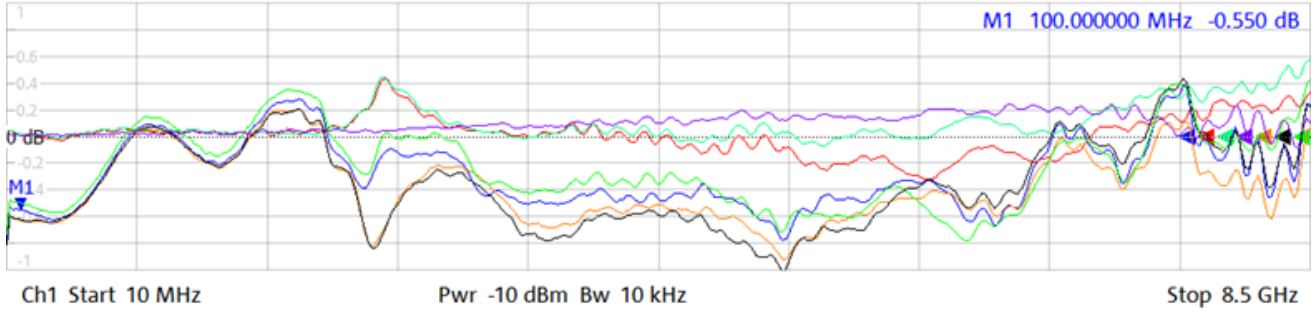

- | | | | | |
|-------------|----------------------------|-------------|------------------------|---|
| Trc3 | — S21 Phase 2°/ Ref 0° Cal | Mem5[Trc3] | — S21 Phase 2°/ Ref 0° | 2 |
| Mem7[Trc3] | — S21 Phase 2°/ Ref 0° | Mem9[Trc3] | — S21 Phase 2°/ Ref 0° | |
| Mem11[Trc3] | — S21 Phase 2°/ Ref 0° | Mem13[Trc3] | — S21 Phase 2°/ Ref 0° | |
| Mem15[Trc3] | — S21 Phase 2°/ Ref 0° | | | |

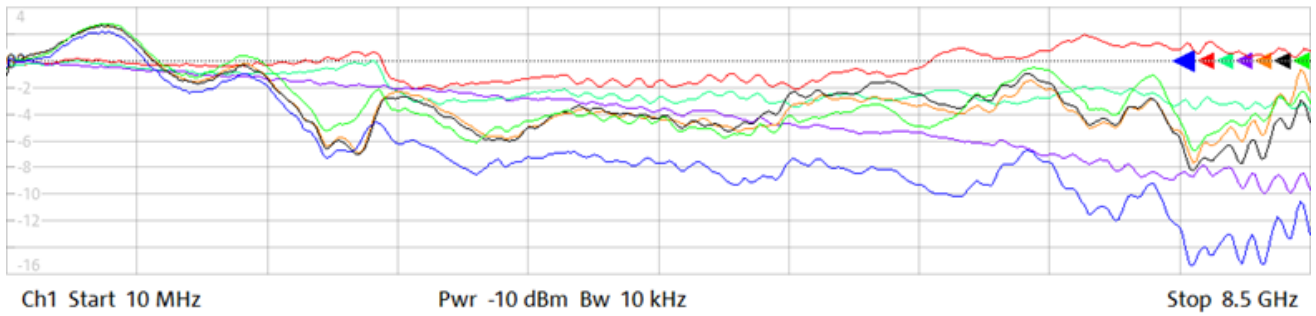

Appearances


Front View



Rear View Variant with AC Supply and Remote Monitoring (P/N: 1501.6302.2)



Dimensions

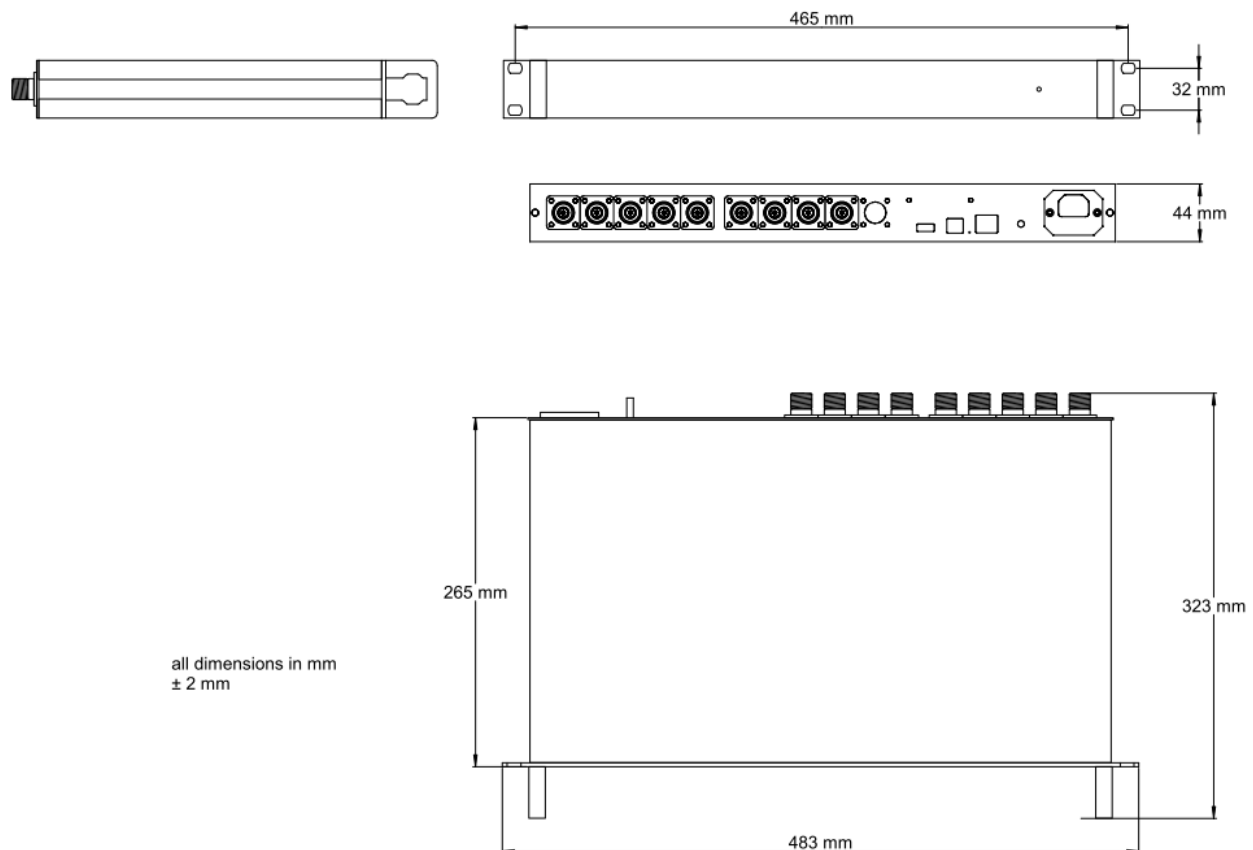

Related Products

Product	P/N	Description
WSDU-1X8R	1107.6102.1	High Dynamic 8 Way Multicoupler 100 kHz ... 4000 MHz. 90...260 V AC power supply.
WSDU-1X8R	1107.6102.2	High Dynamic 8 Way Multicoupler 100 kHz ... 4000 MHz. 18...28 V DC power supply.
WSDU-2X4R	1107.6202.1	High Dynamic 2 Section 4 Way Multicoupler 100 kHz ... 4000 MHz. 90...260 V AC power supply.
WSDU-2X4R	1107.6202.2	High Dynamic 2 Section 4 Way Multicoupler 100 kHz ... 4000 MHz. 18...28 V DC power supply.
WSDU-1X8SR	1502.6102	High Dynamic 1X8 Shortwave Signal Distribution Unit 200 kHz ... 30 MHz, 90...260 V AC power supply. Variant with LAN remote interface with SNMPv2 trap function available.
WSDU-1X8SR	1502.6102	High Dynamic 1X8 Shortwave Signal Distribution Unit 200 kHz ... 30 MHz, 18...28 V DC power supply. Variant with LAN remote interface with SNMPv2 trap function available.
WSDU-2X4ER	1501.6202	Extremely Wideband 2 Section 1X4 Signal Distribution Unit 20 MHz... 8000 MHz, 90...260 V AC power supply. Variant with LAN remote interface with SNMPv2 trap function available.
WSDU-2X4ER	1501.6202	Extremely Wideband 2 Section 1X4 Signal Distribution Unit 20 MHz... 8000 MHz, 18...28 V DC power supply. Variant with LAN remote interface with SNMPv2 trap function available.
WSDU-1X8ER	1501.6302	Extremely Wideband 1 to 8 Signal Distribution Unit 20 ... 8000 MHz, 90...260 V AC power supply. Variant with LAN remote interface with SNMPv2 trap function available.
WSDU-1X8ER	1501.6302	Extremely Wideband 1 to 8 Signal Distribution Unit 20 MHz... 8000 MHz, 18...28 V DC power supply. Variant with LAN remote interface with SNMPv2 trap function available.

